
Thuraya Data – Gen 1

Modem Installation


Dial Up Networking Using Standard Serial Cable

Using USB > Serial Converter


Installing USB Data Cable

Modem Installation – Windows XP


The following procedure applies regardless of which type of data cable is used to connect to the Thurara Gen 1 Handset

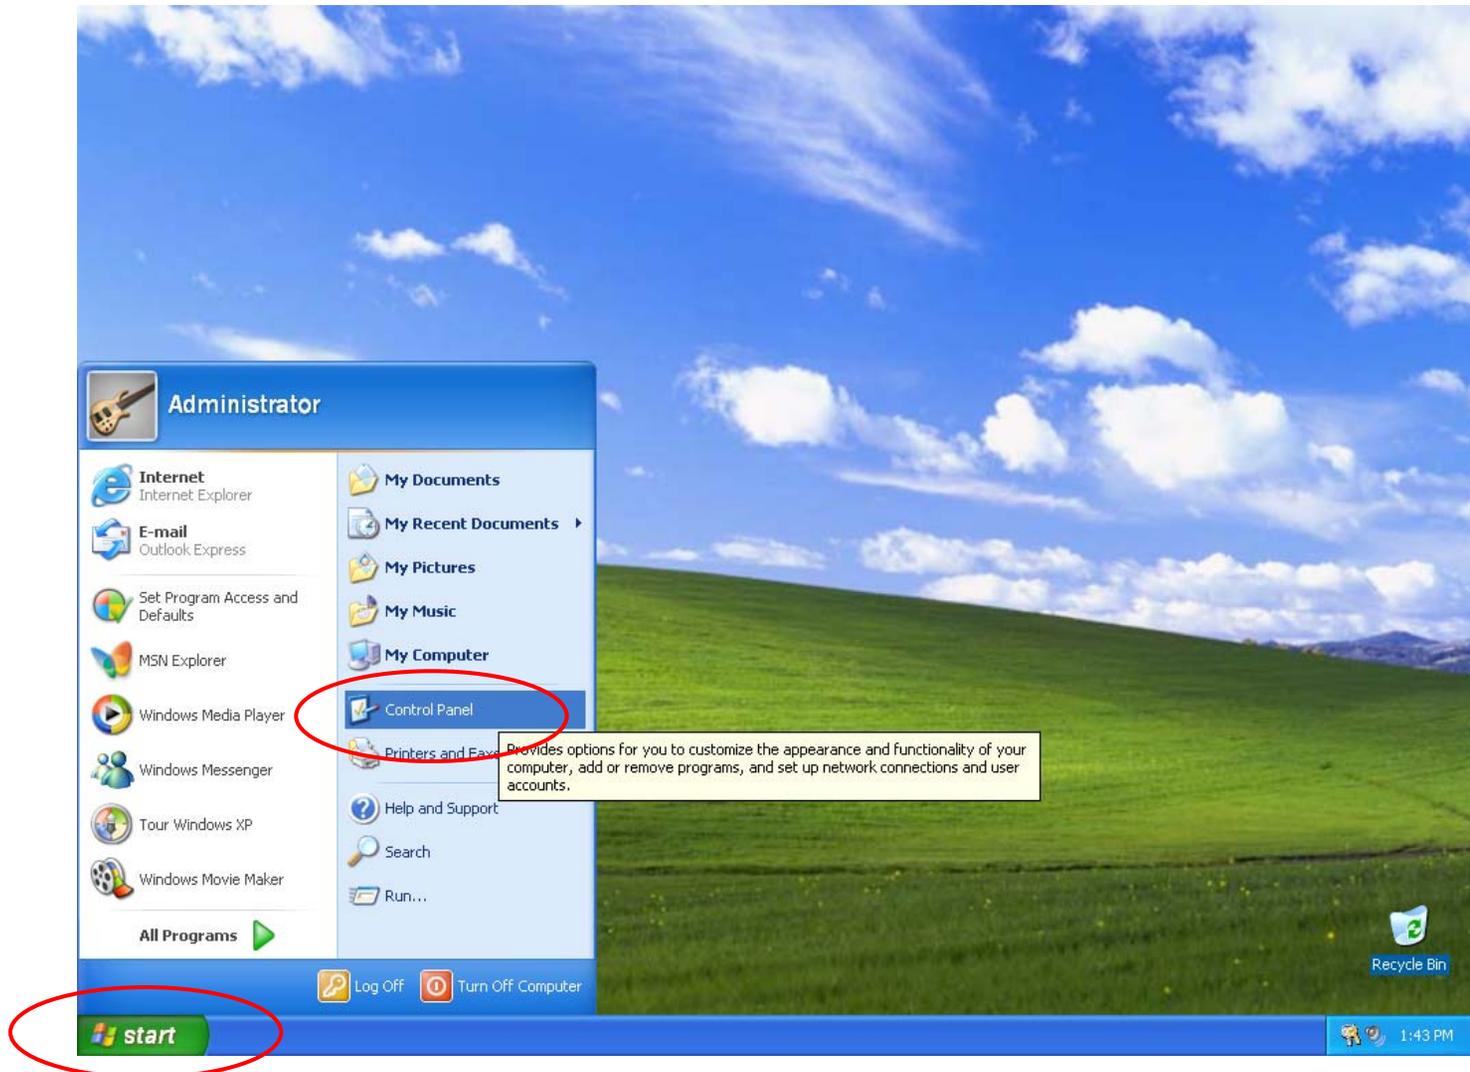


Click on the **Start** button, then select **Control Panel**

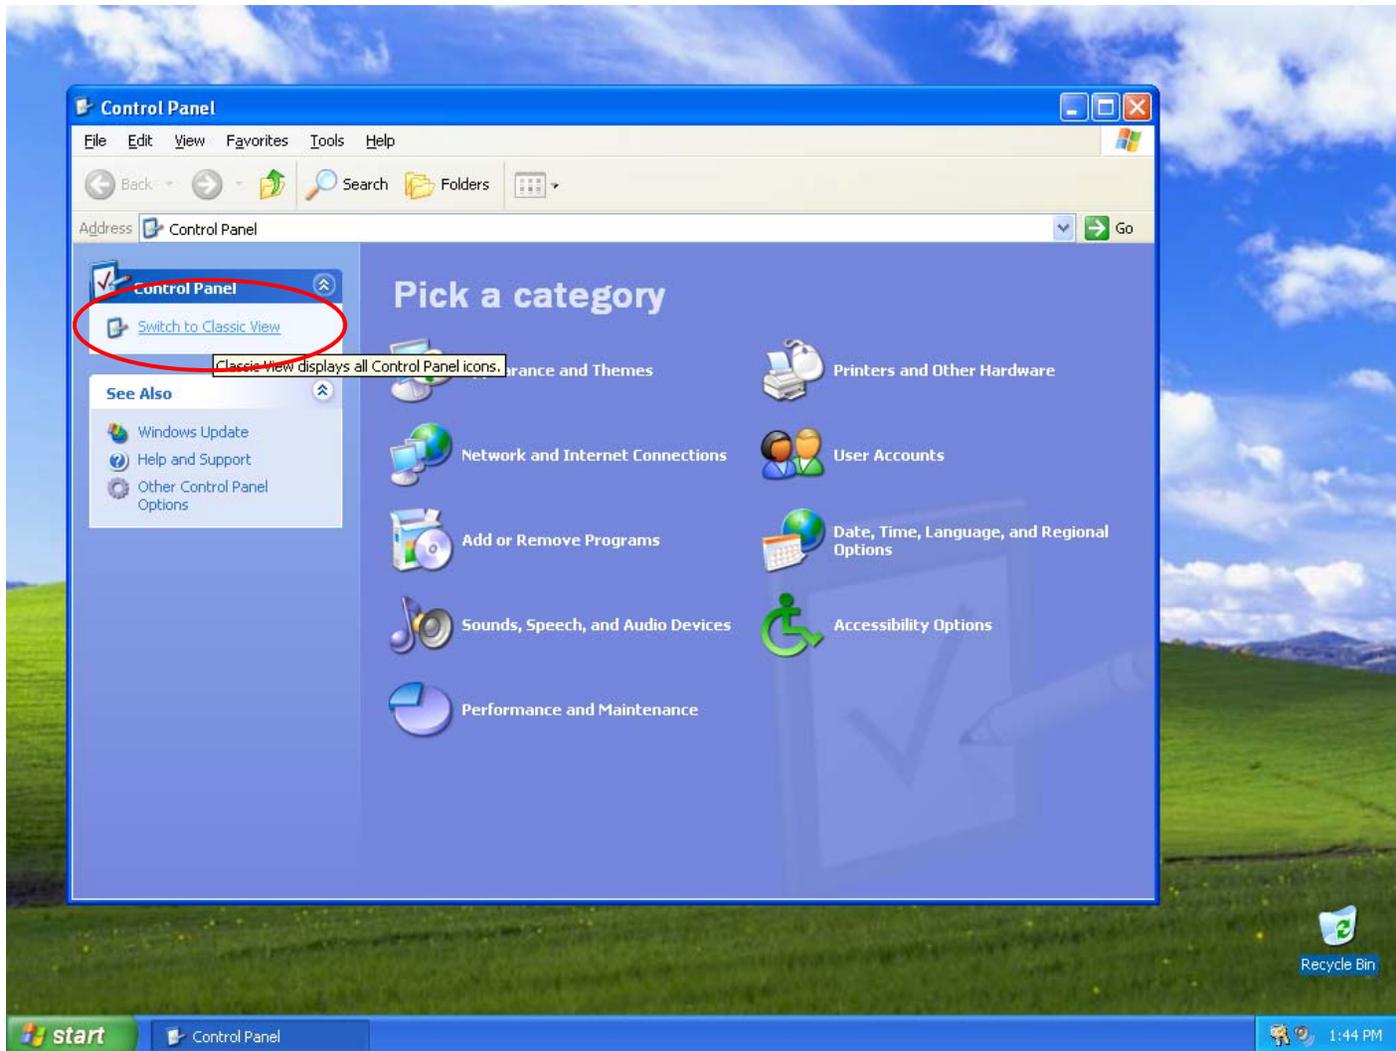


Select **Switch to Classic View**

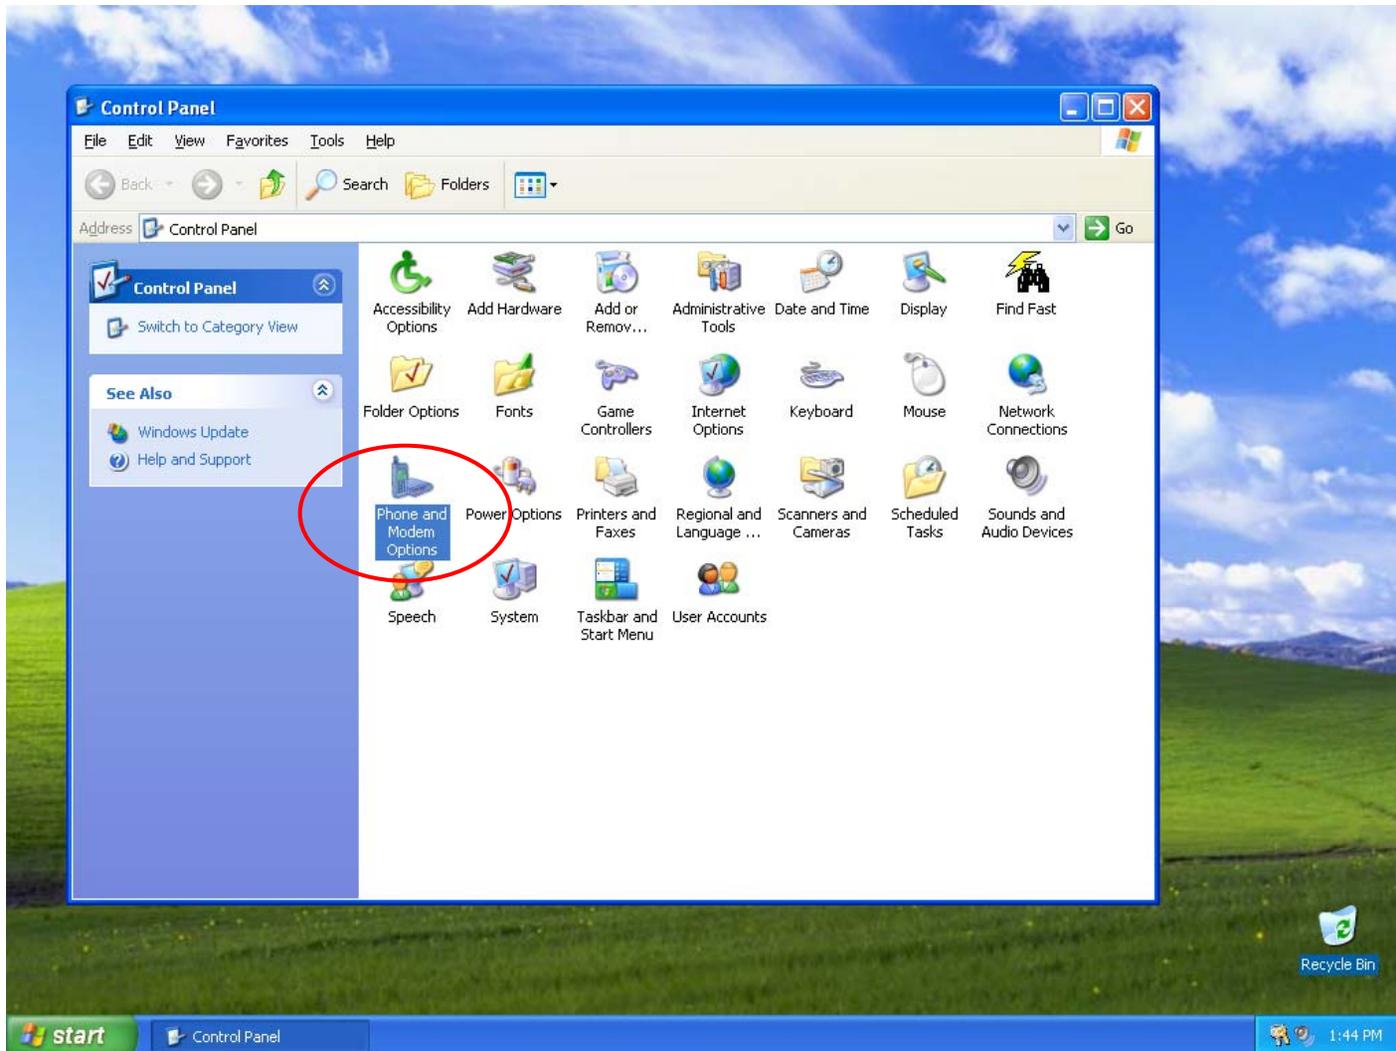


Double Click on **Phone and Modem Options**

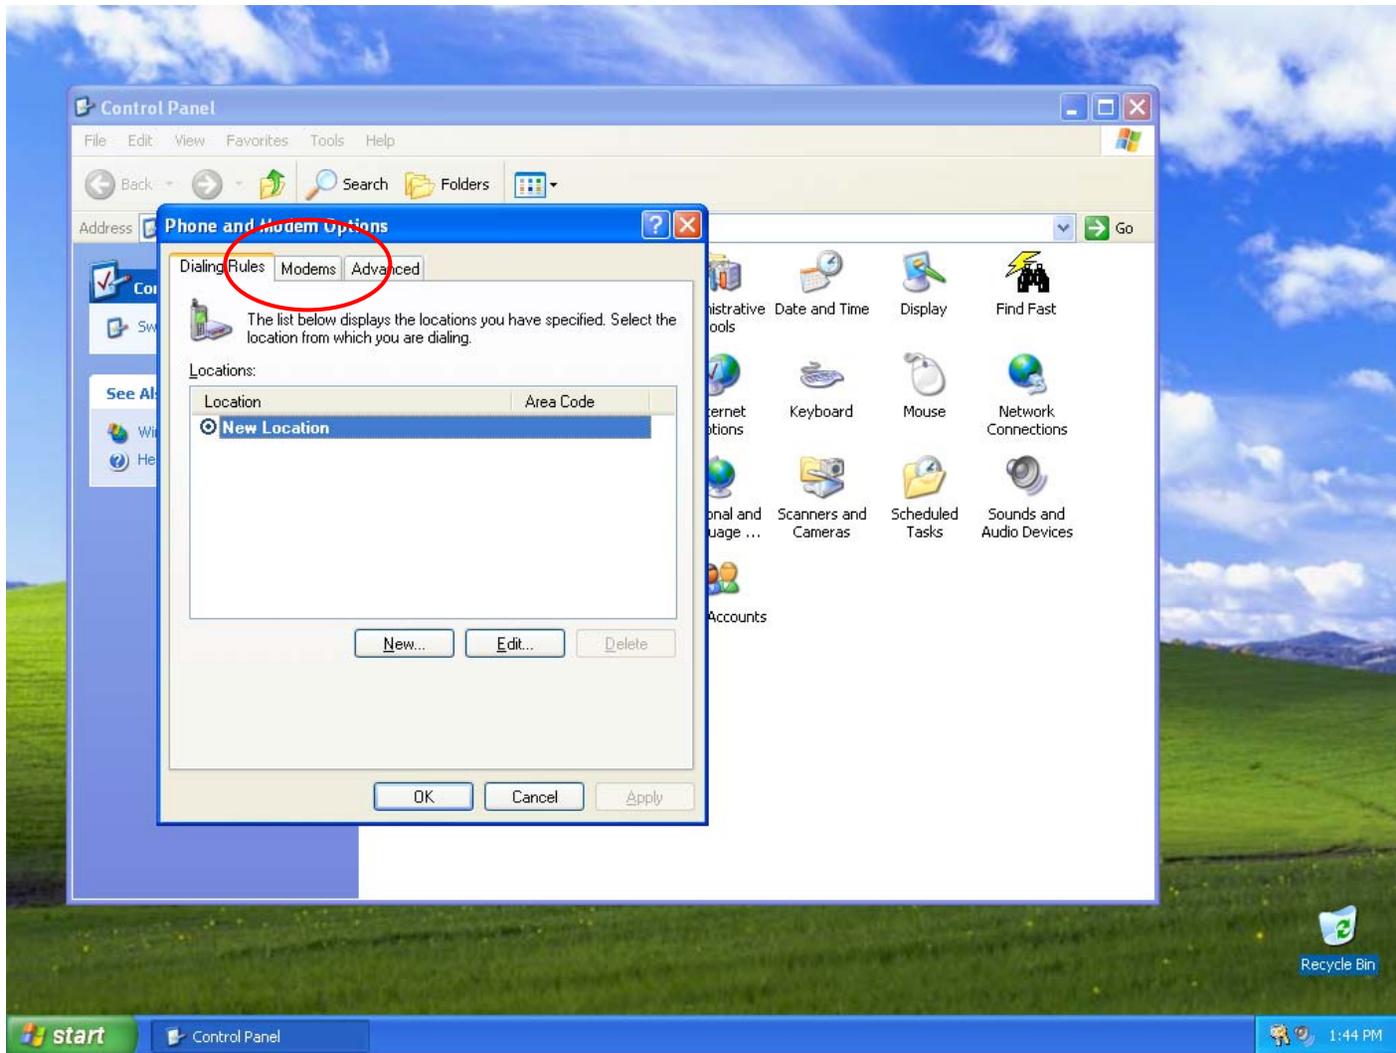


Select the **Modems** tab in the pop up window

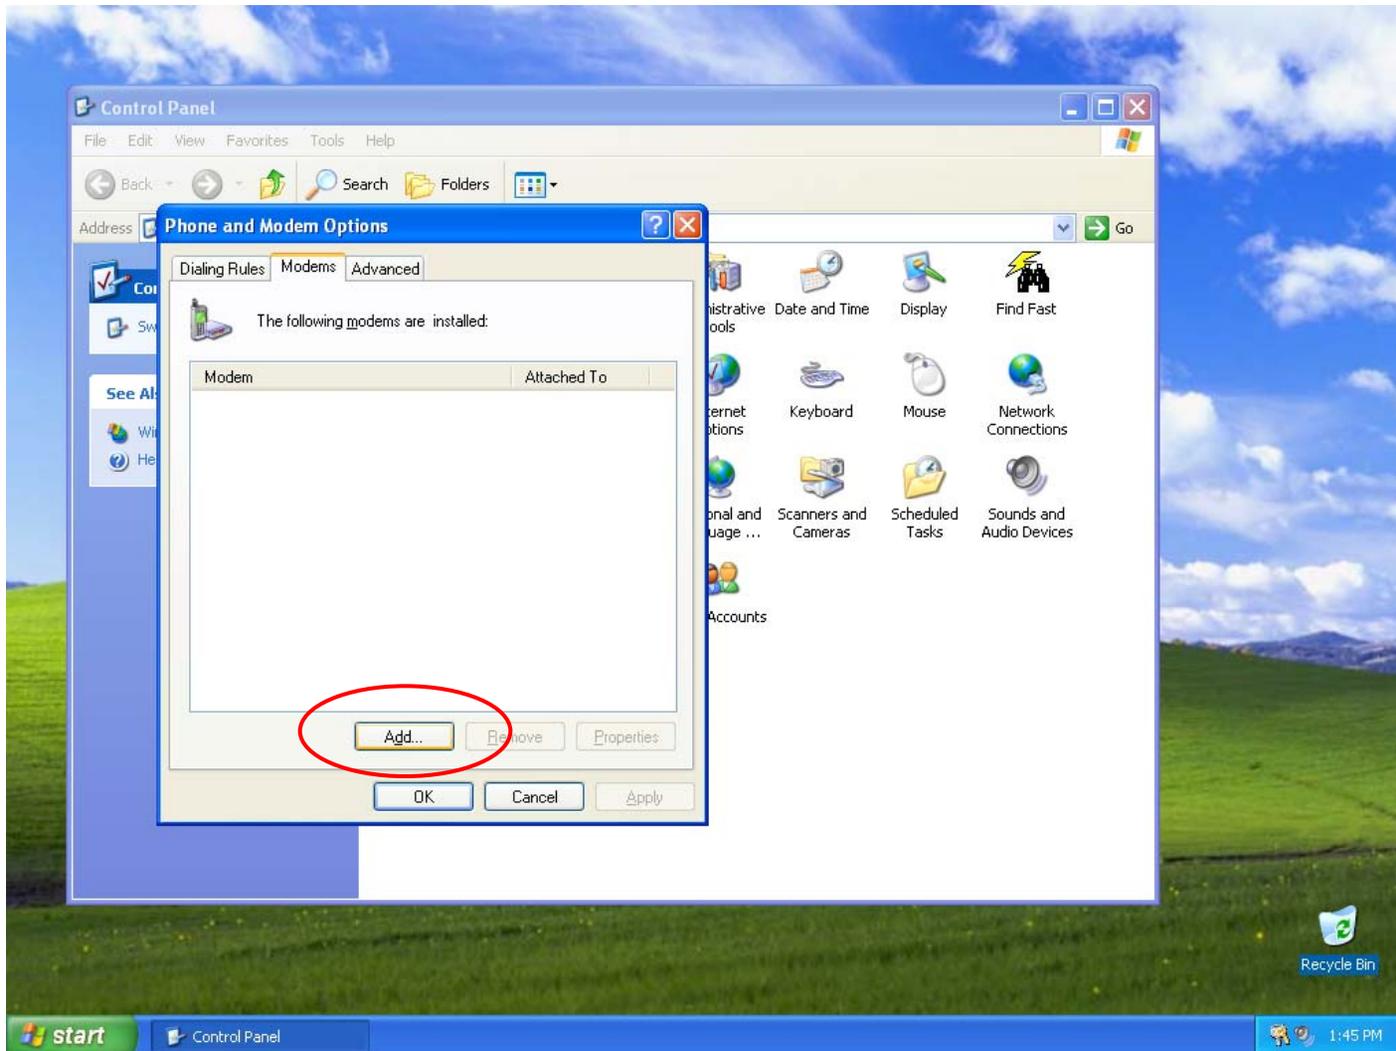


Click on the **Add** button

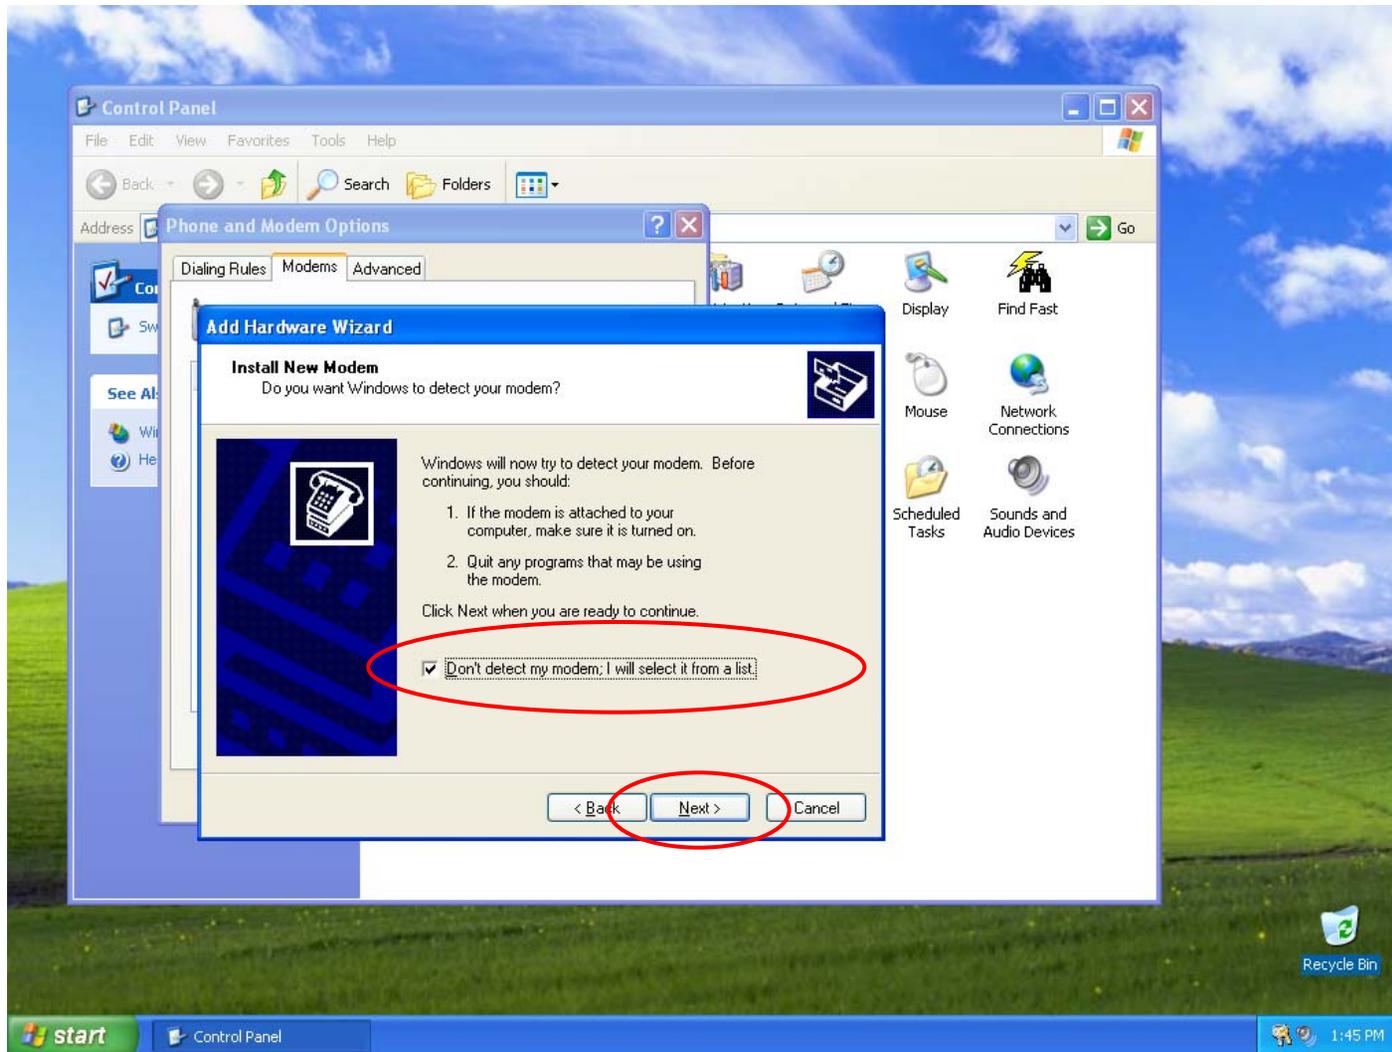


Tick the box marked **Don't detect my modem; I will select it from a list**, then click on **Next**

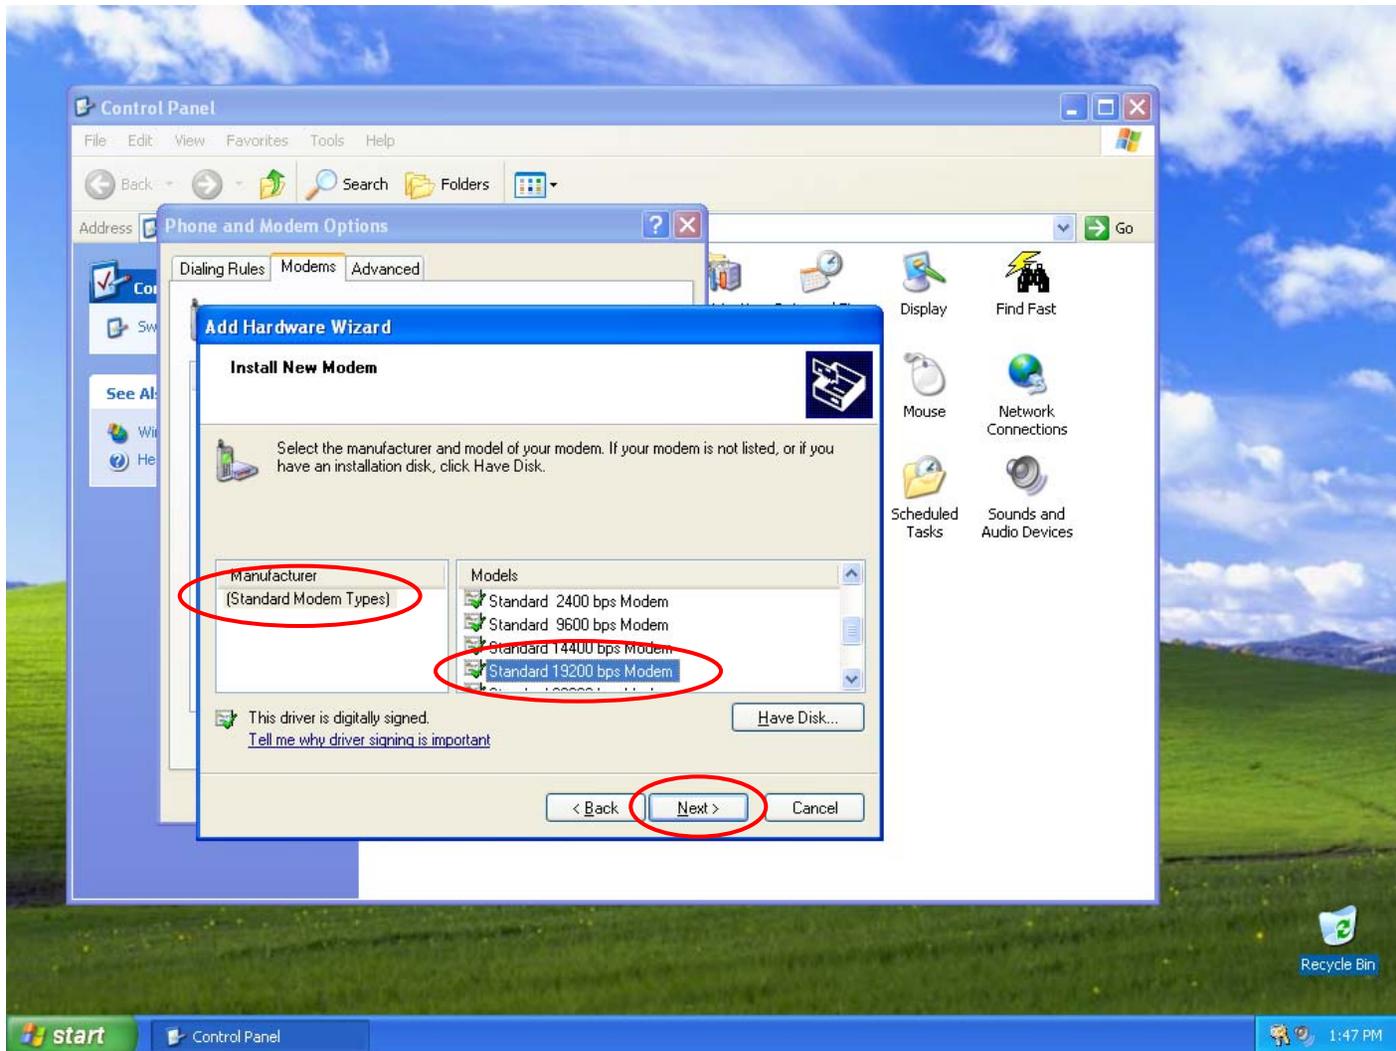


Select **Standard Modem Types**, then select a **Standard 19,200 bps Modem** and click on **Next**

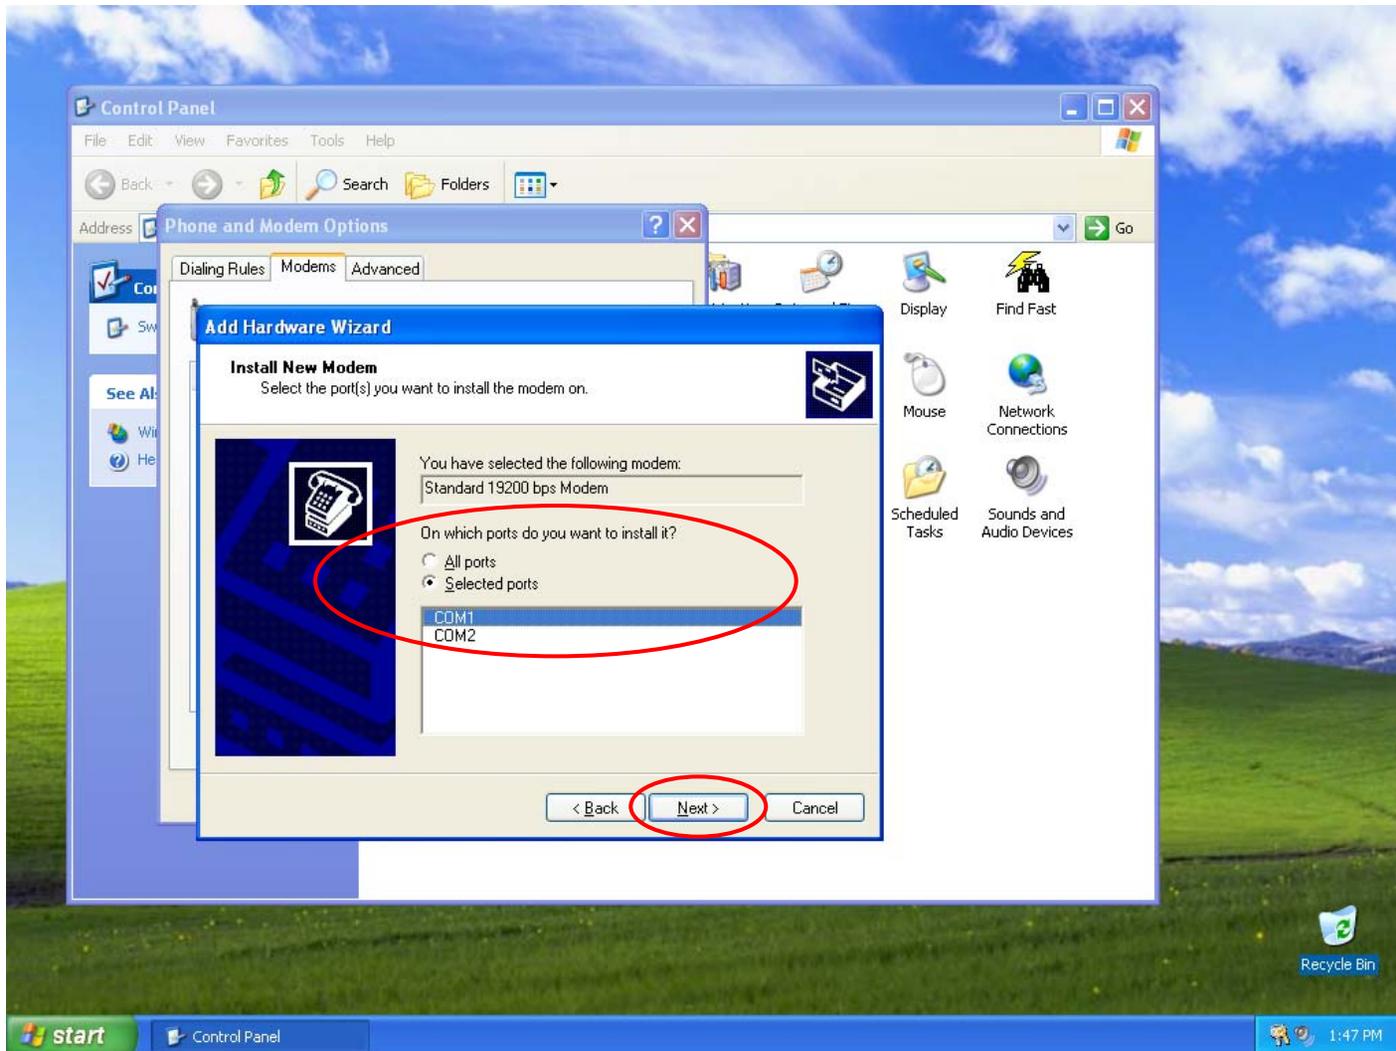


Choose which **COM port** you want to install the modem on and click on **Next**

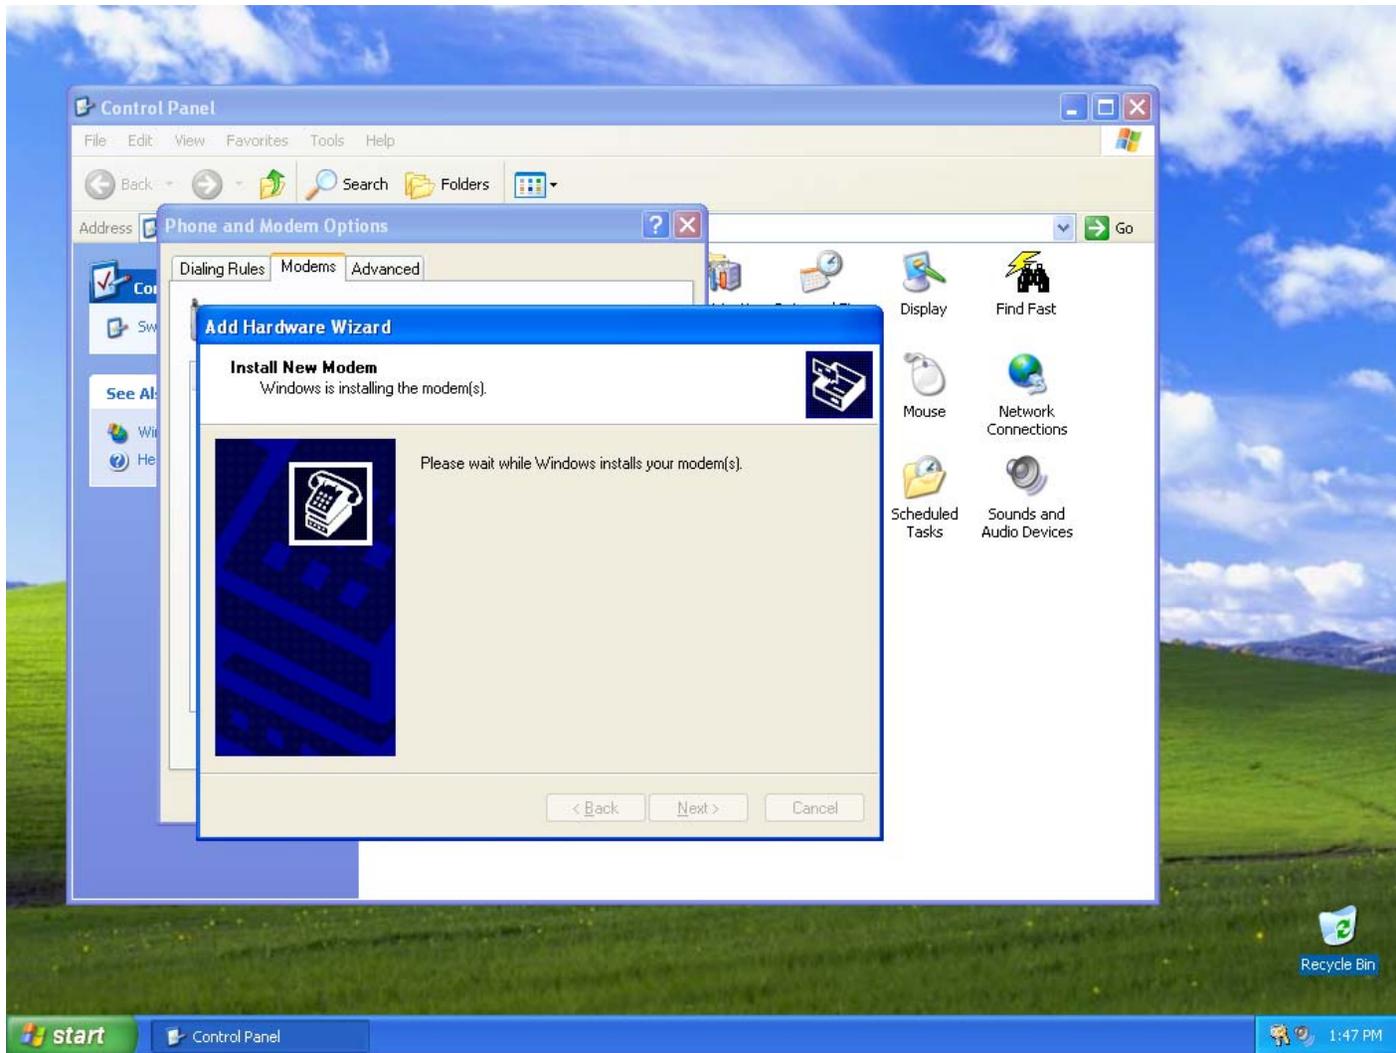

Wait while Windows installs your modem

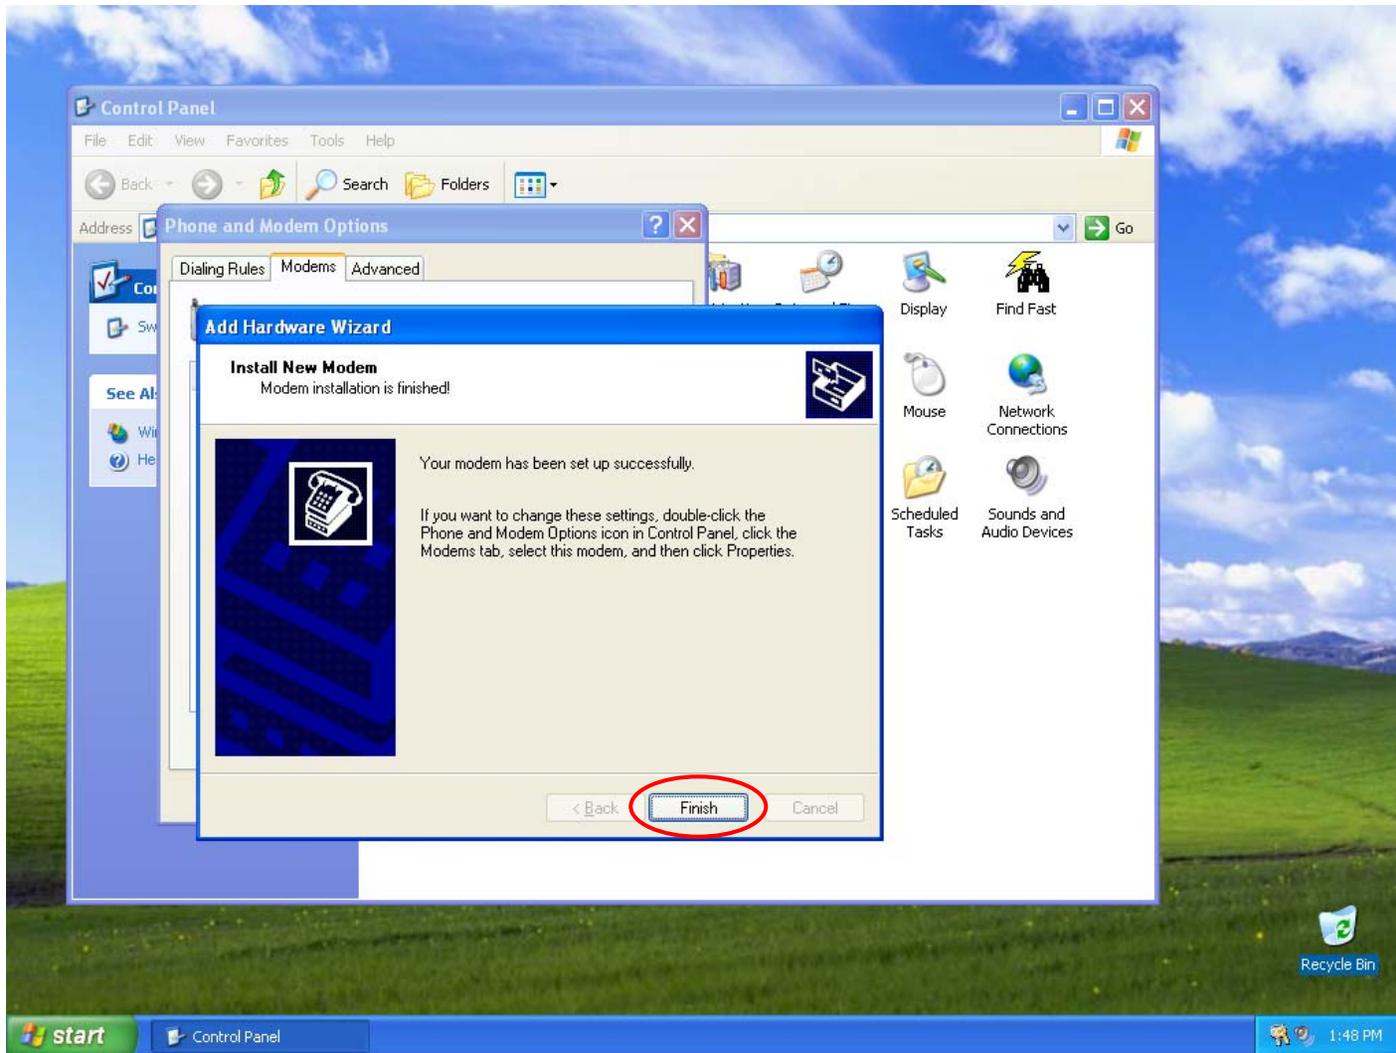

Click on **Finish**

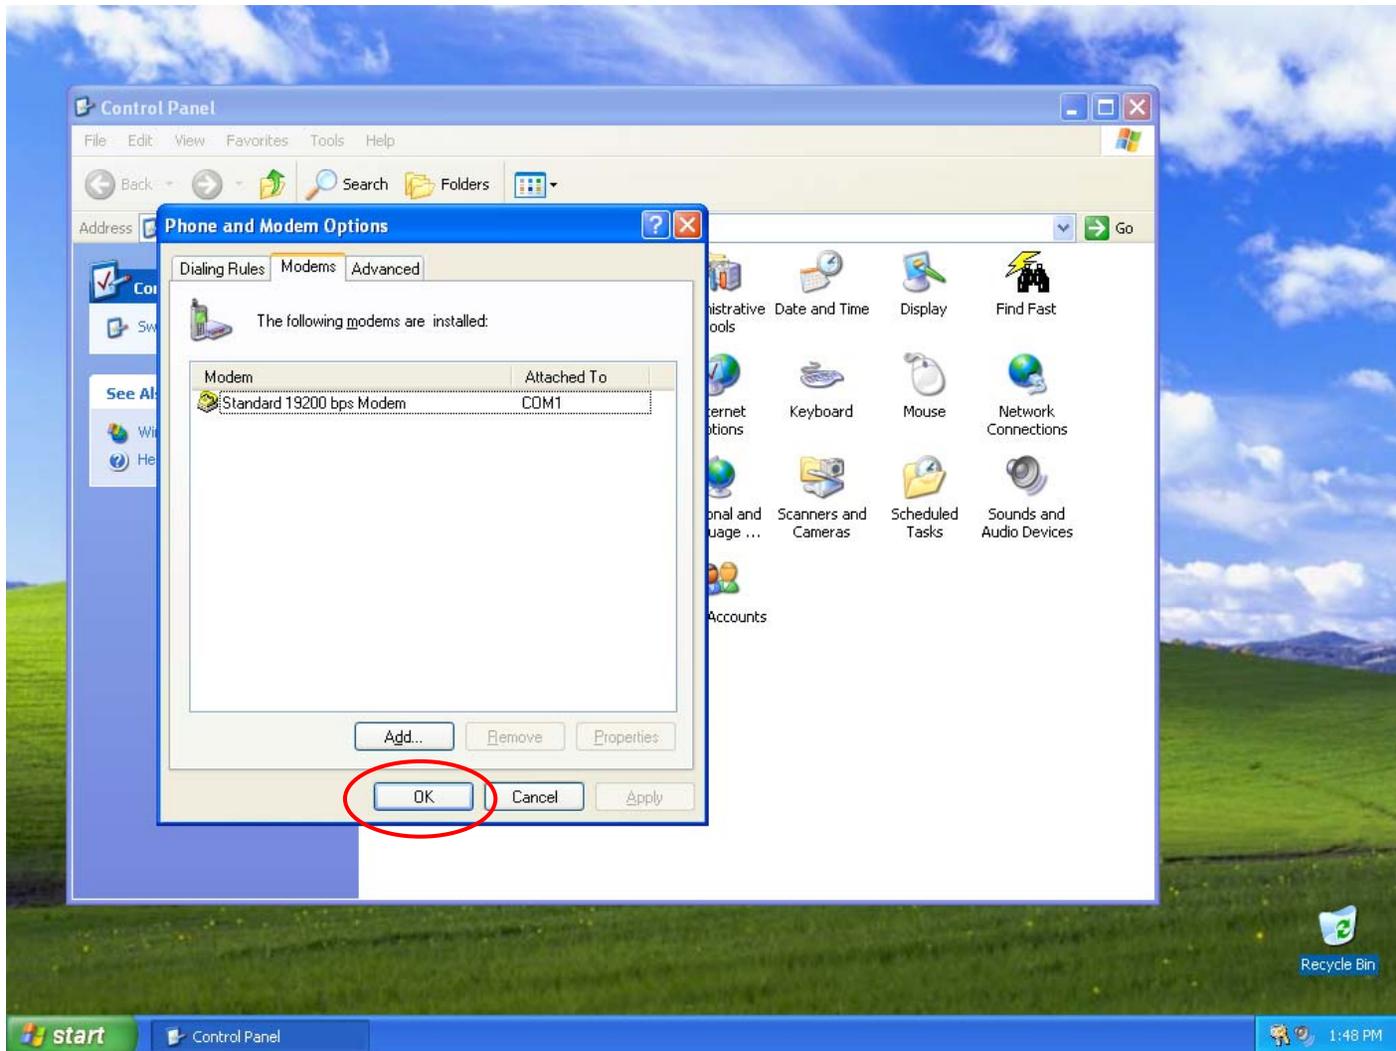


You will then see the following screen, your modem has been successfully installed. Click on **OK**


Setting up a Network Connection

Dial up connection details


- Using Customer supplied ISP details
- Using Thuraya as your ISP (PPP connection)
- Phone no:
 - As advised by ISP
 - Ensure number is entered in full international format
- Phone No
 - 1722
- Username:
 - As advised by ISP
- Username:
 - Leave Blank
- Password:
 - As advised by ISP
- Password:
 - Leave Blank

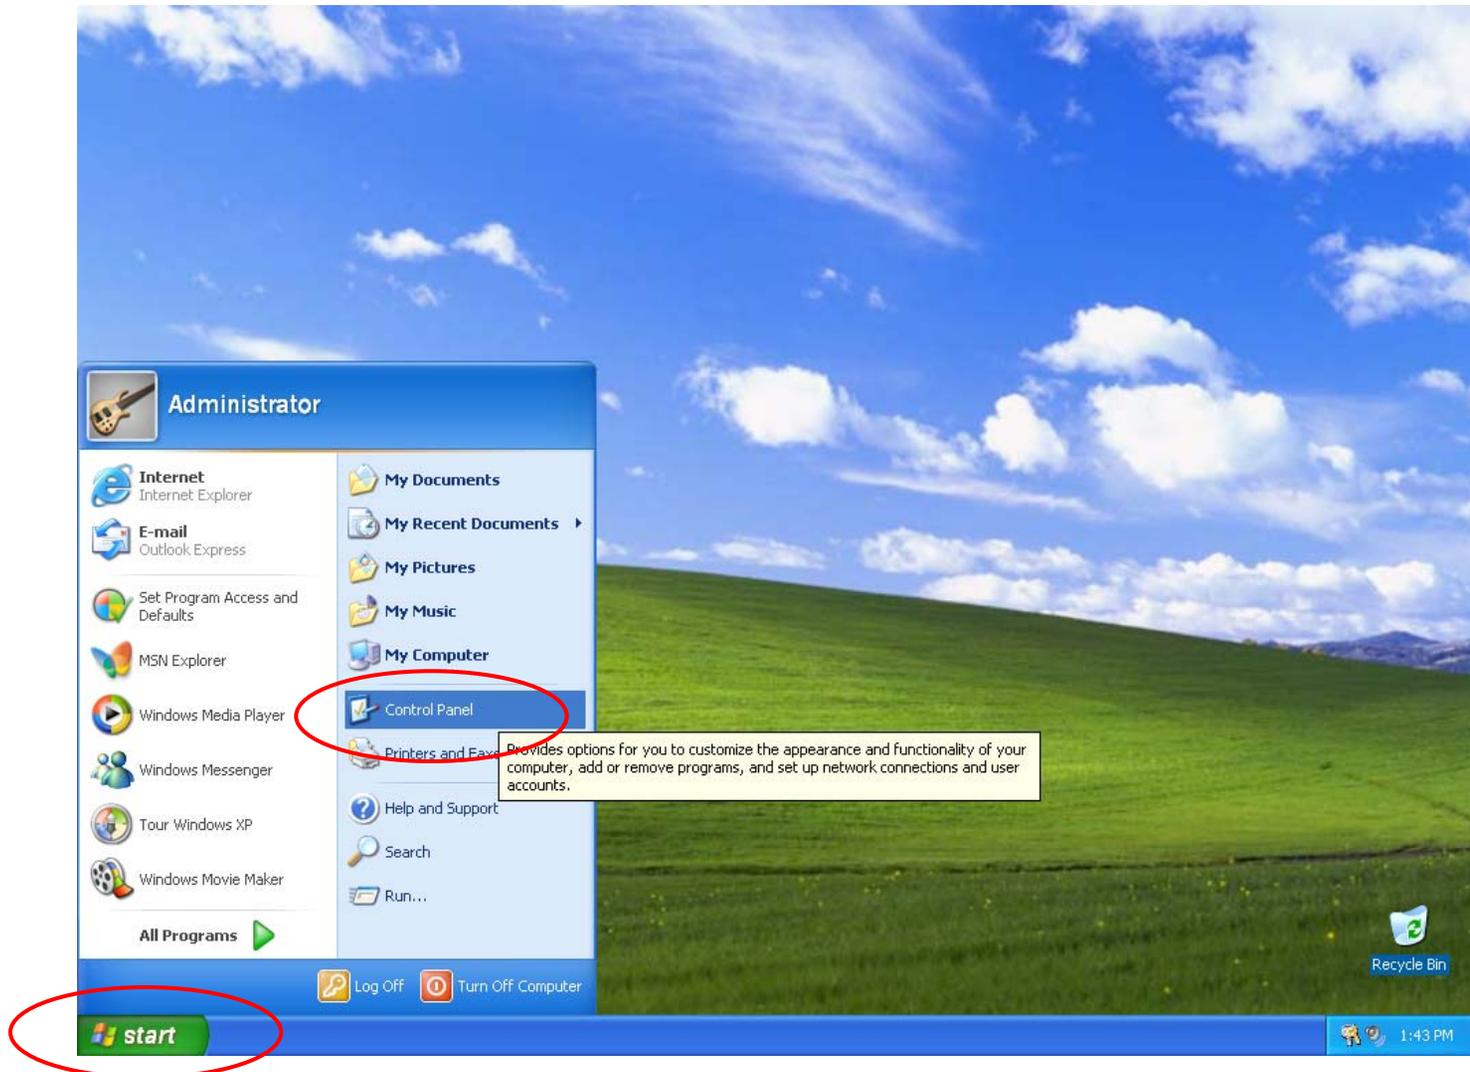


Click on the **Start** button, then select **Control Panel**

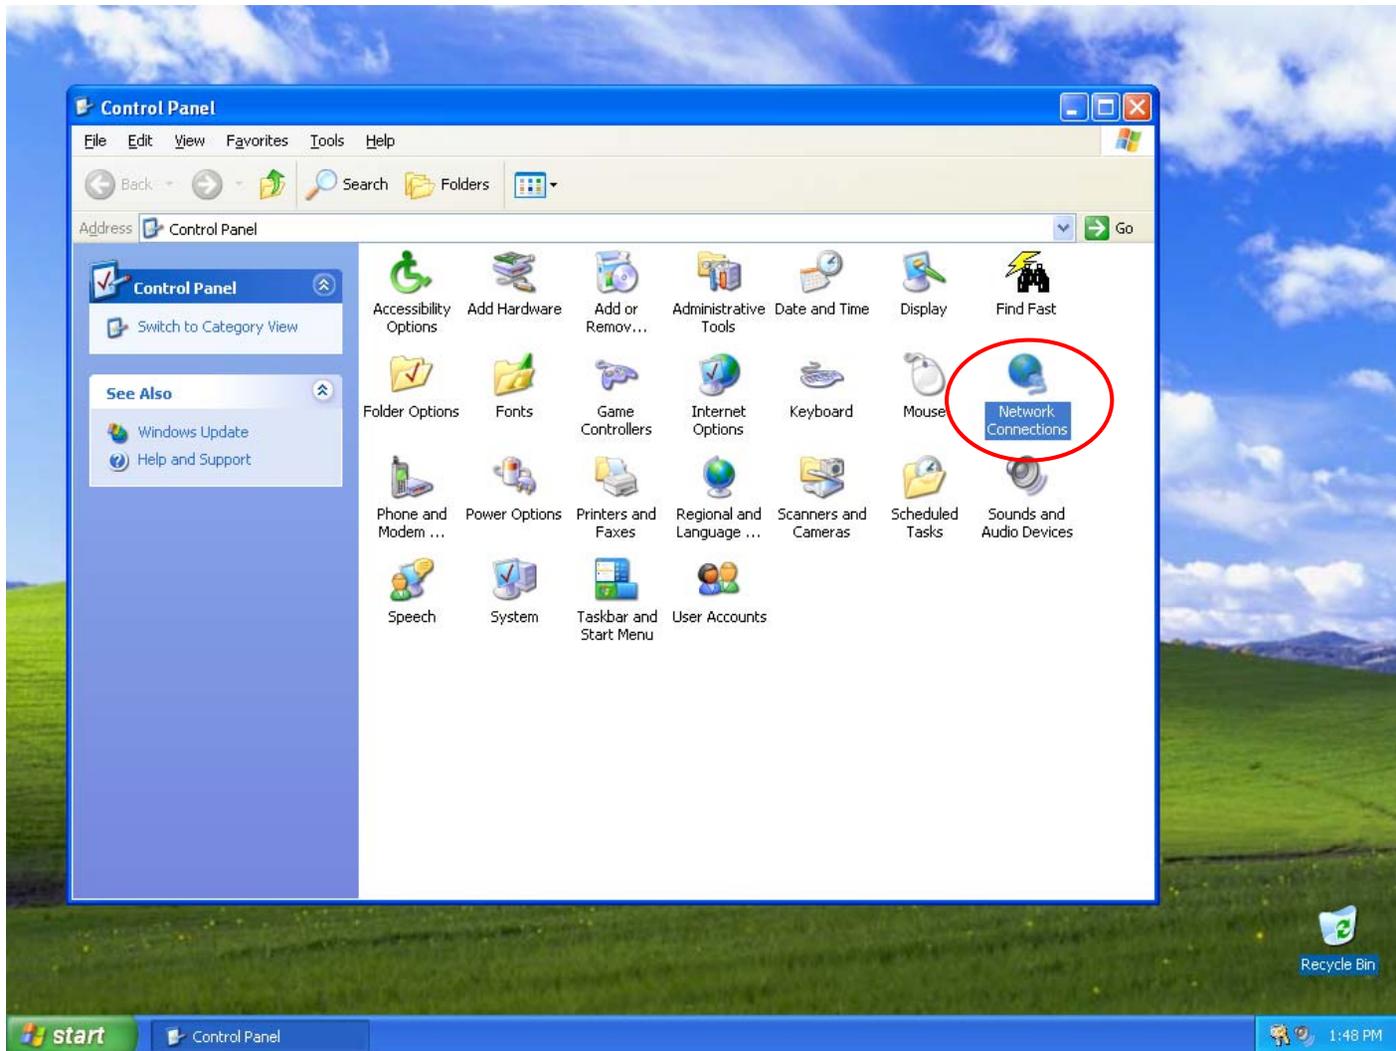


Double Click on **Network Connections**

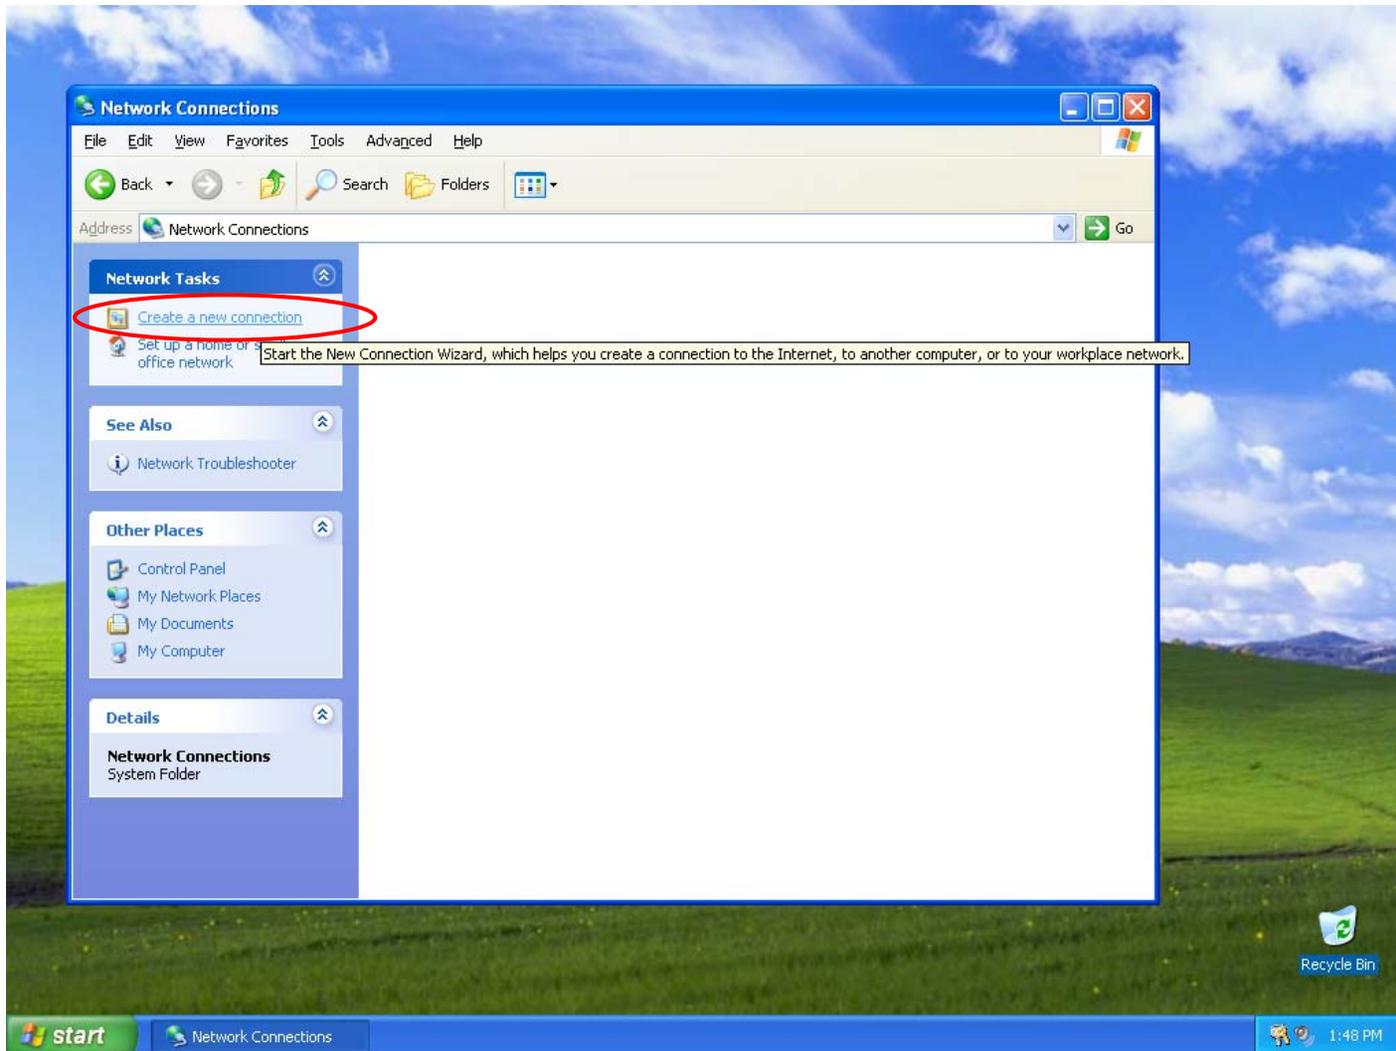


Select **Create a new connection**

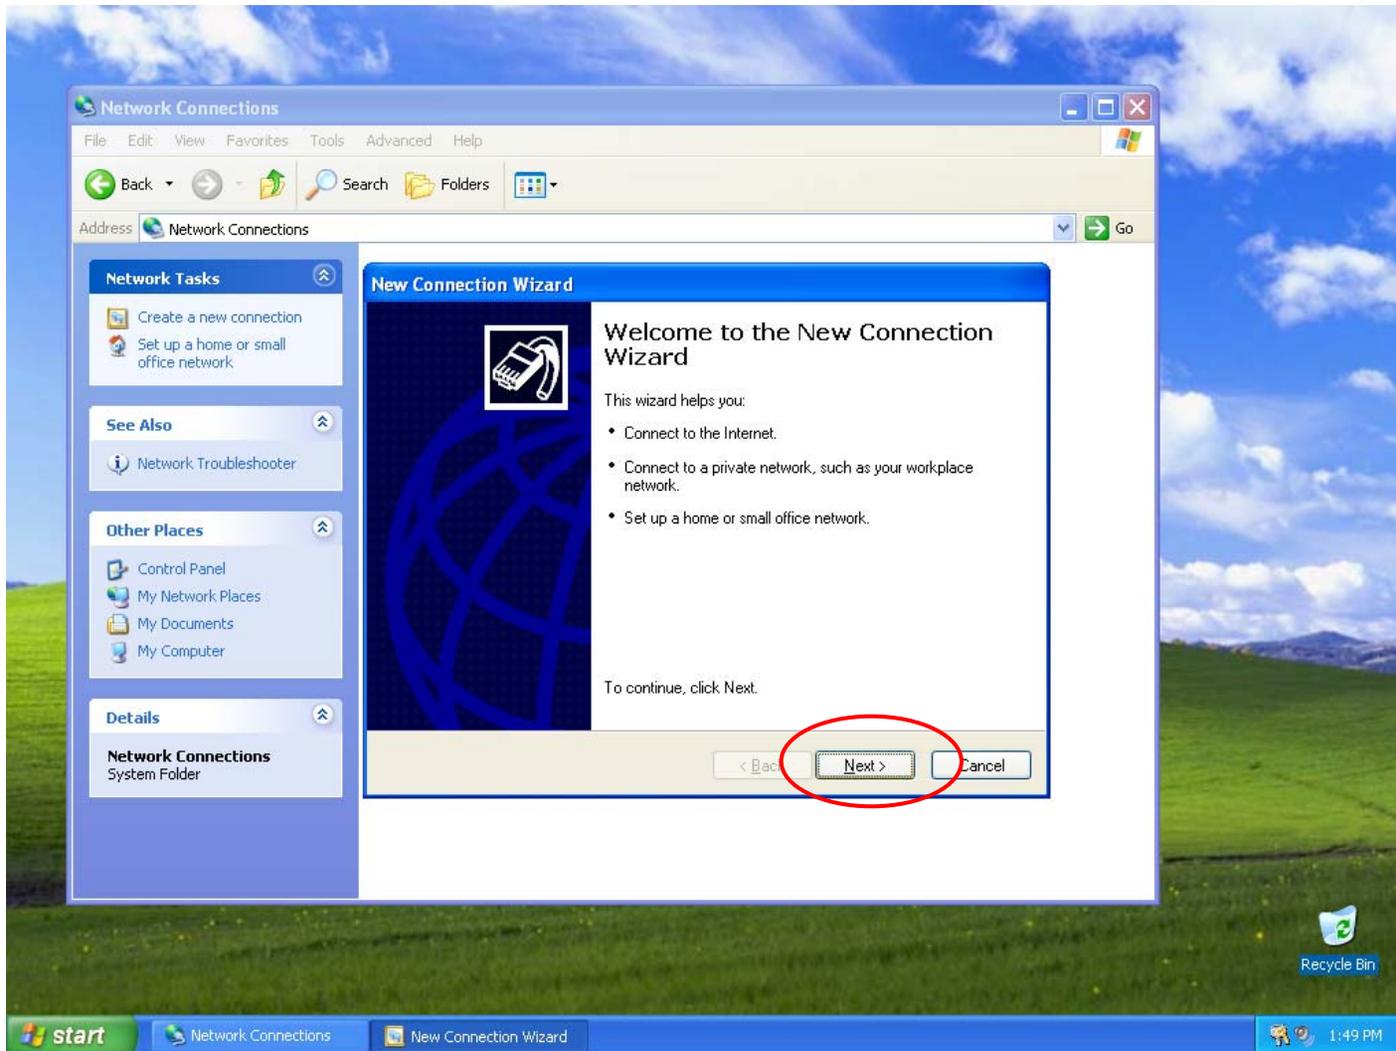


Click on **Next**

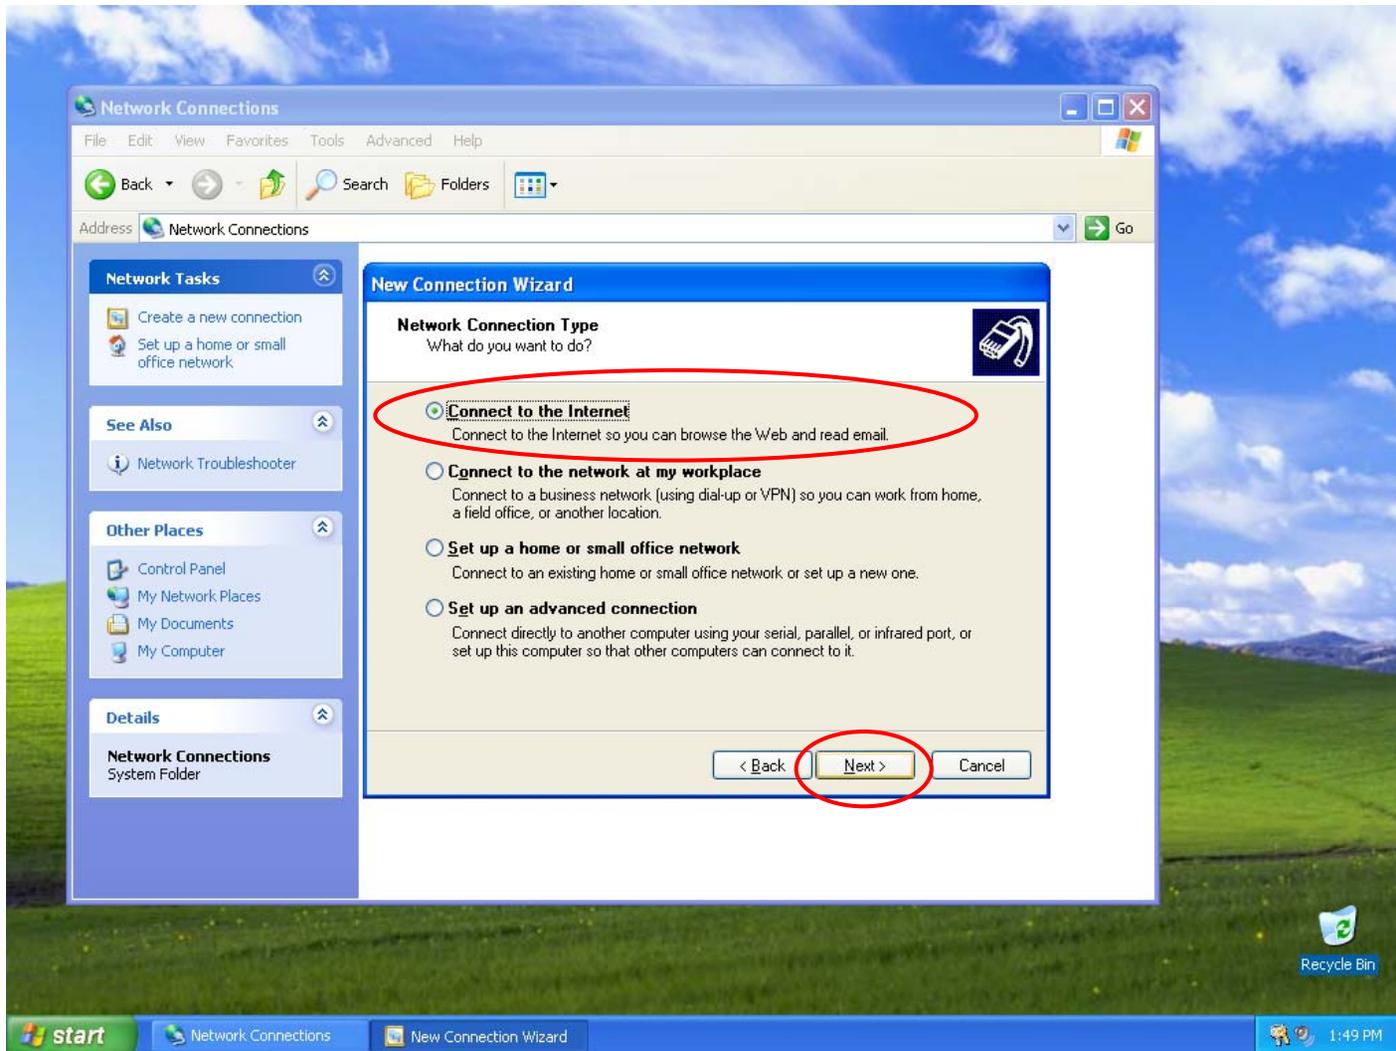


Select **Connect to the Internet** then click on **Next**

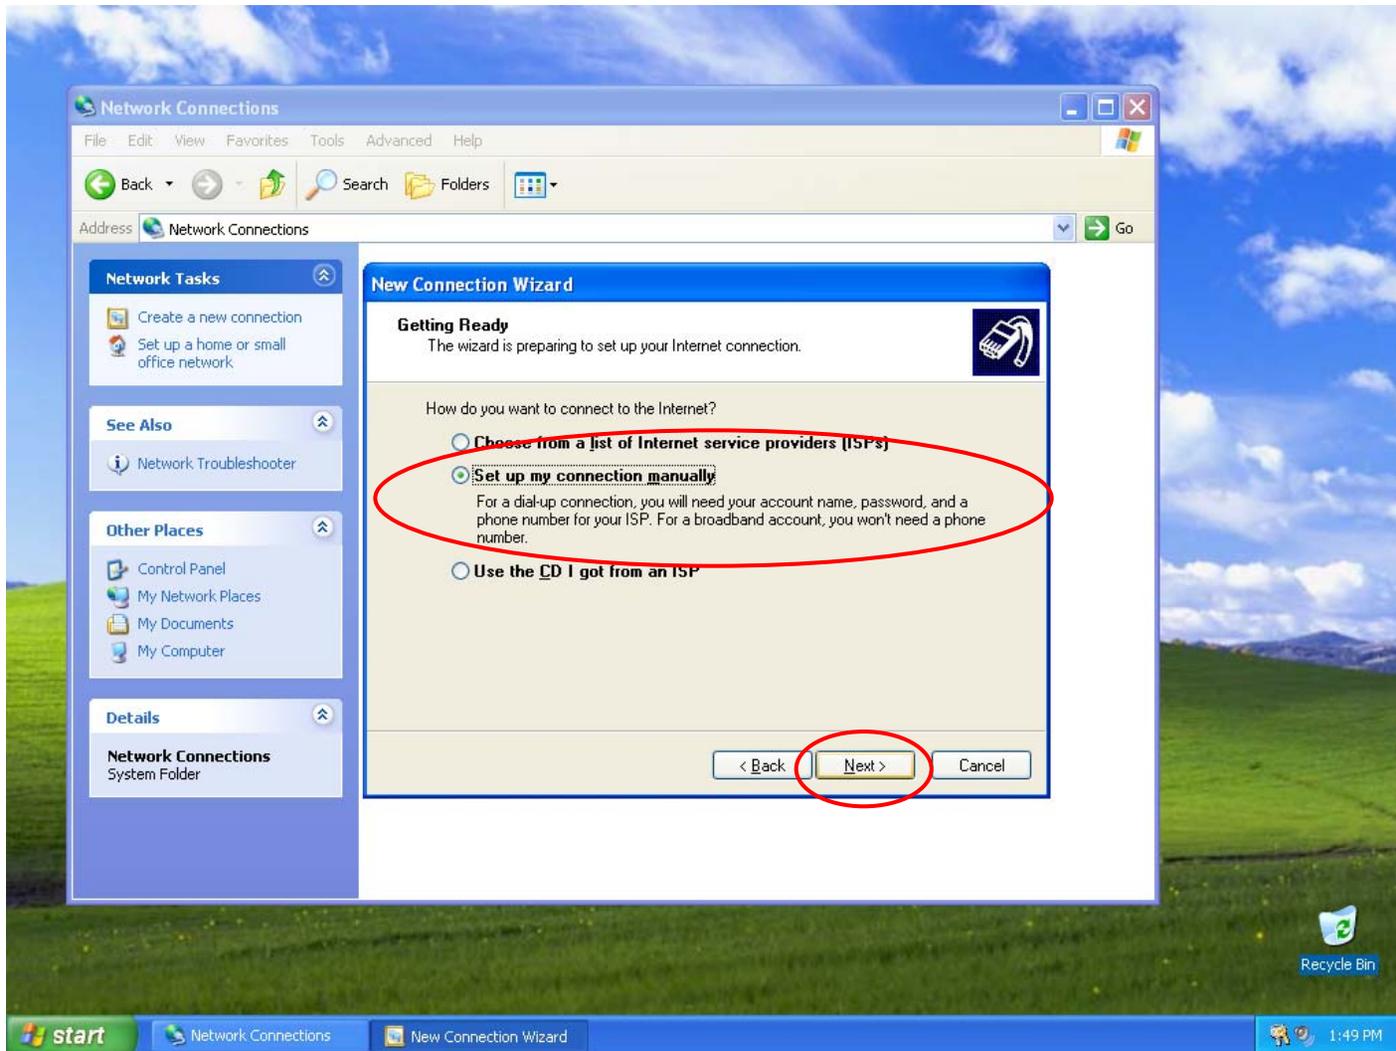


Select **Set up my connection manually** and click on **Next**

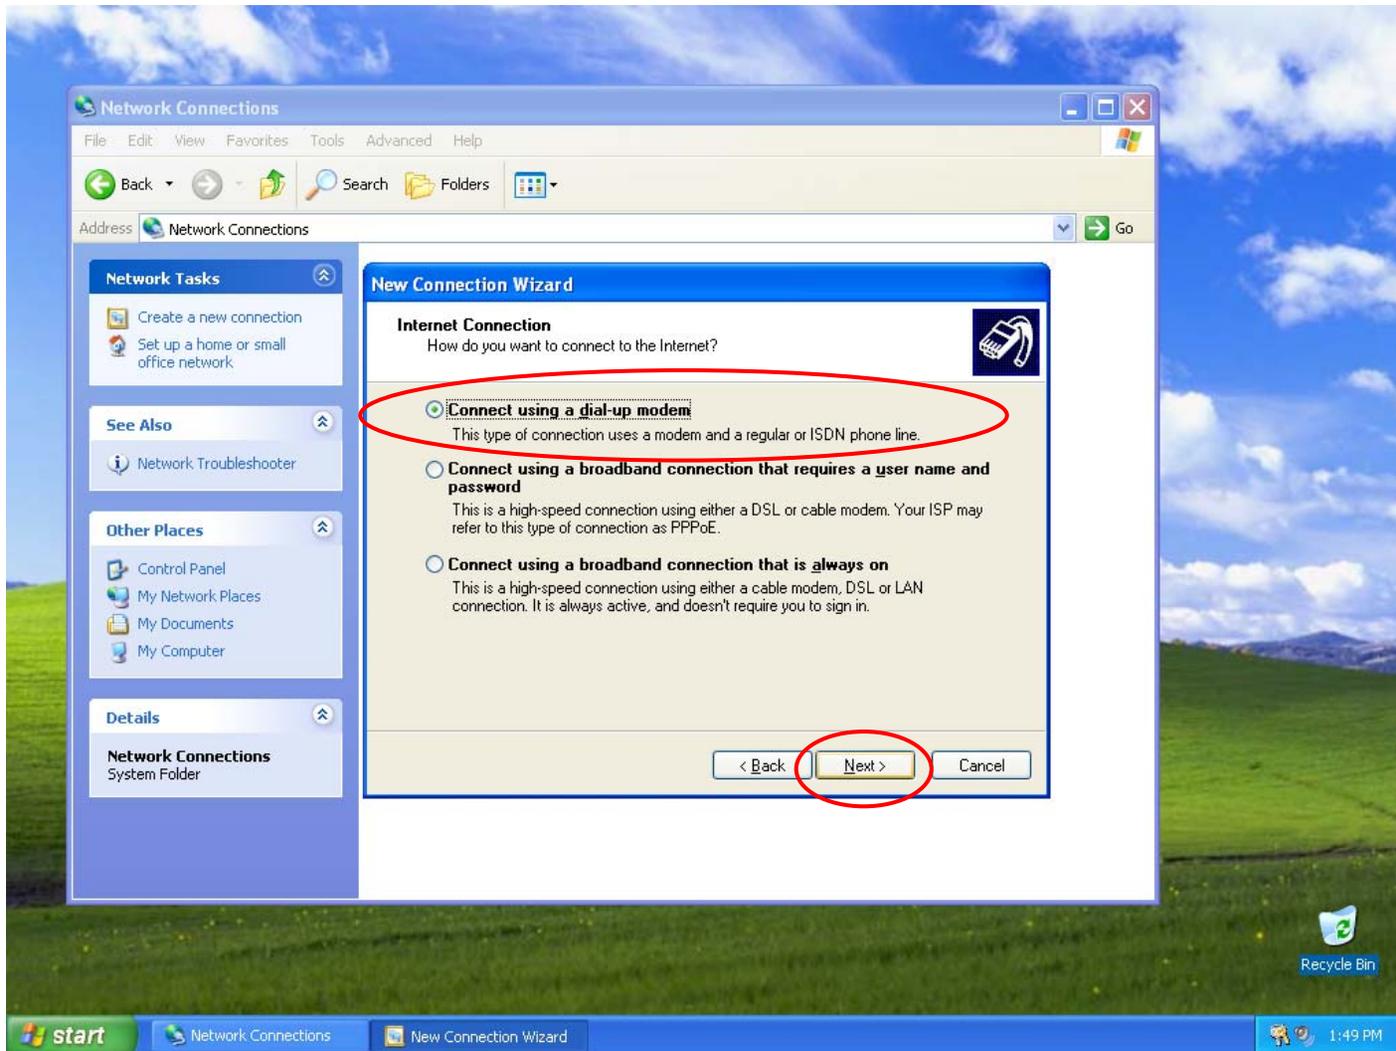


Select **Connect using a dial-up modem** and click on **Next**

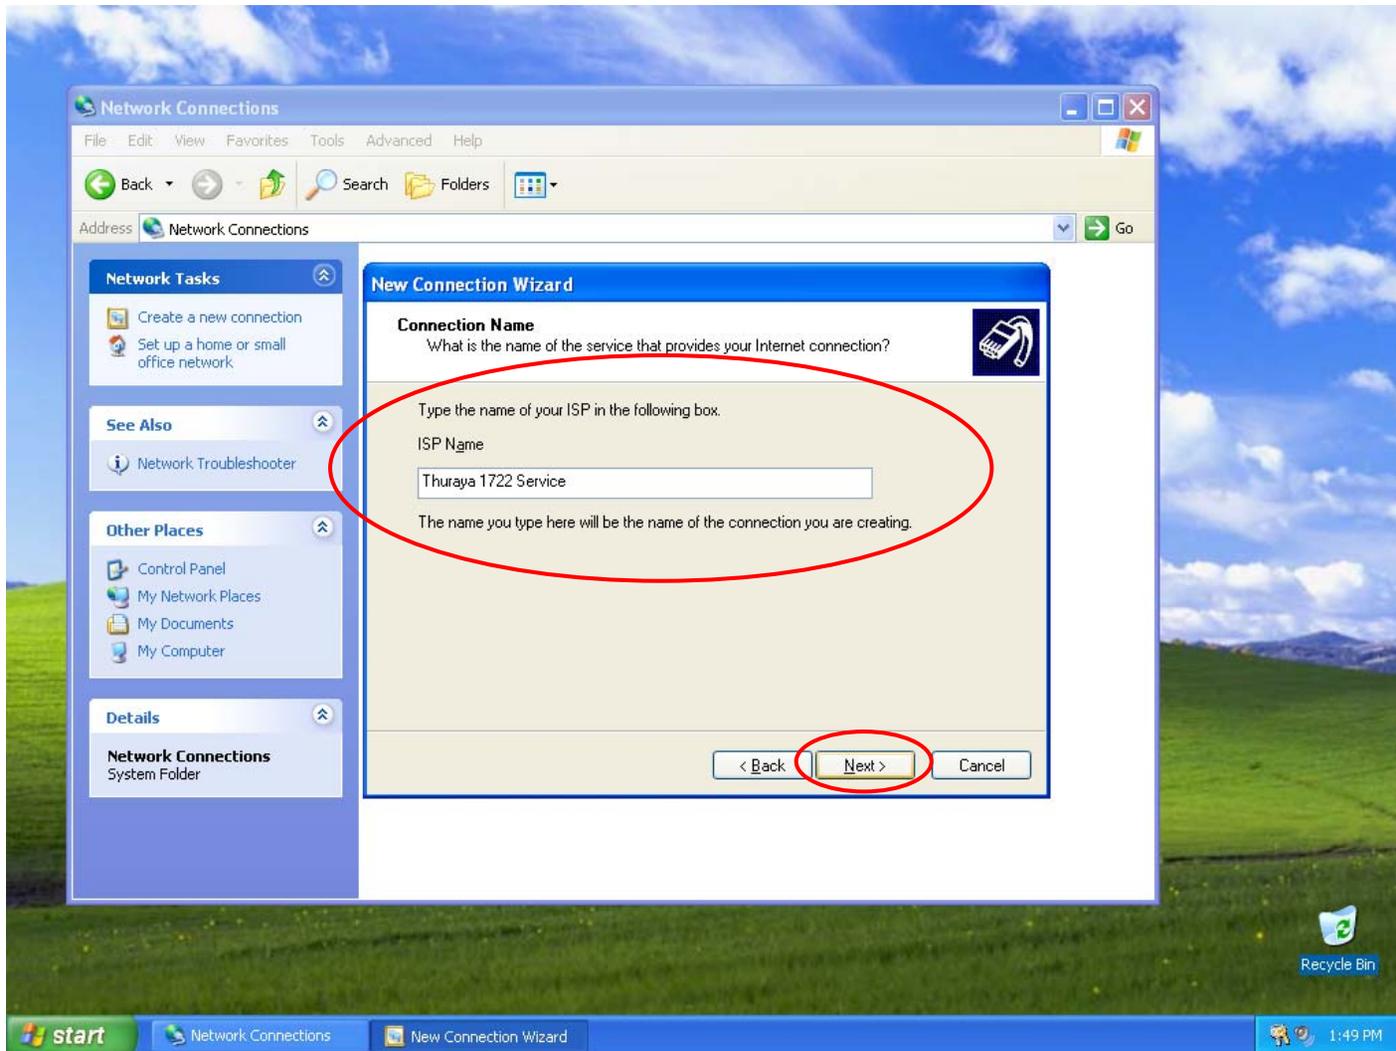


Enter a **suitable name** for your new connection and click on **Next**

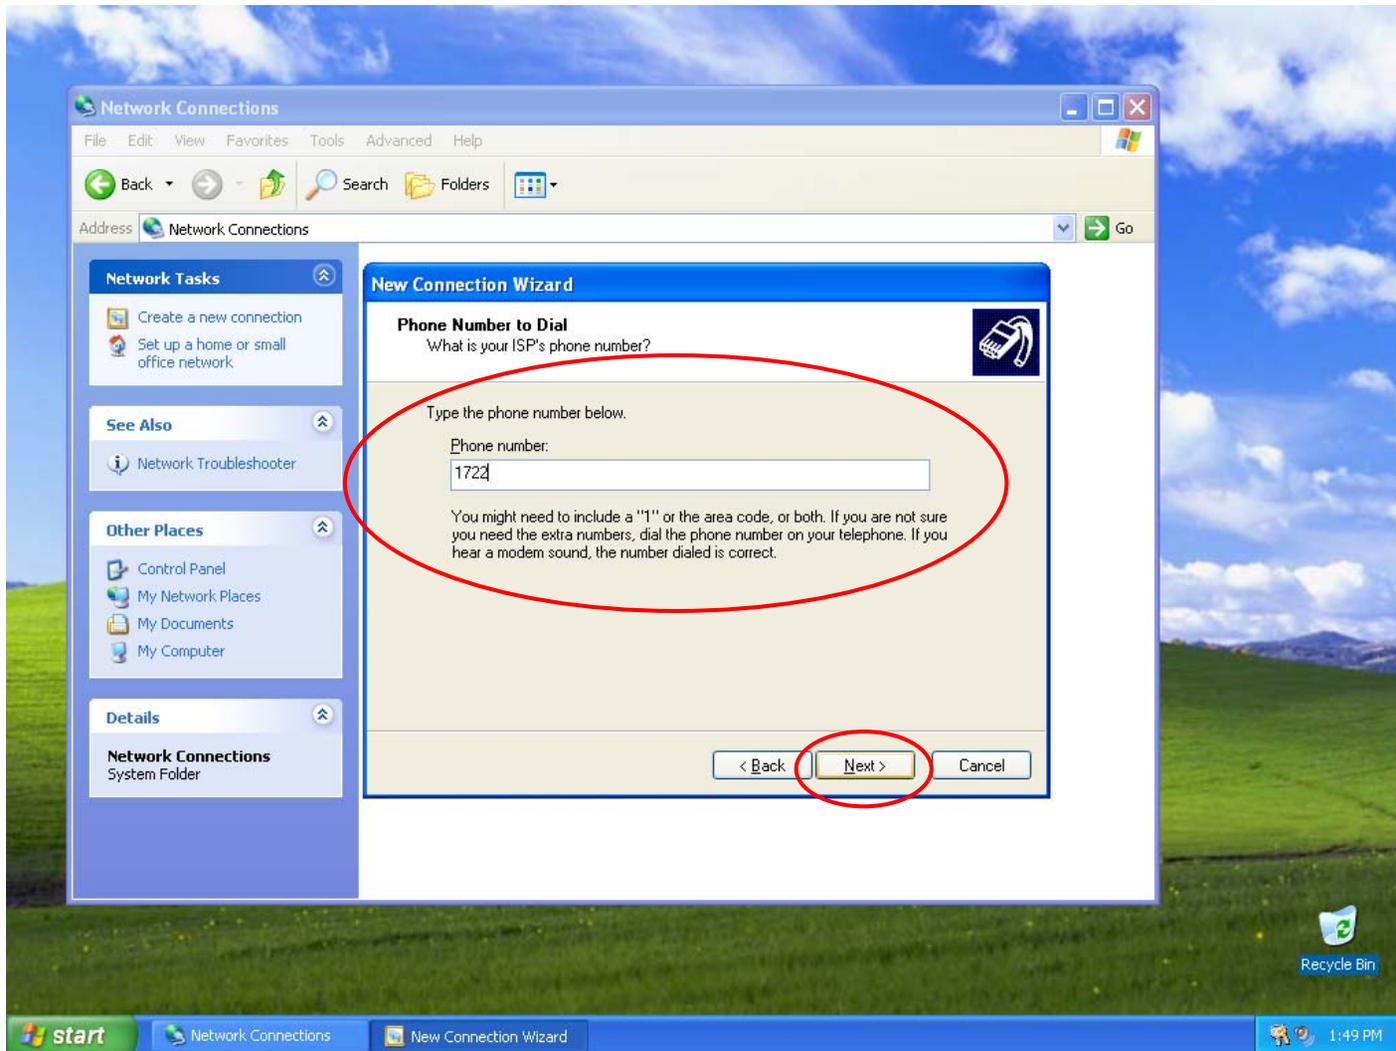


Enter the **Phone number** for your dial up connection and click on **Next**

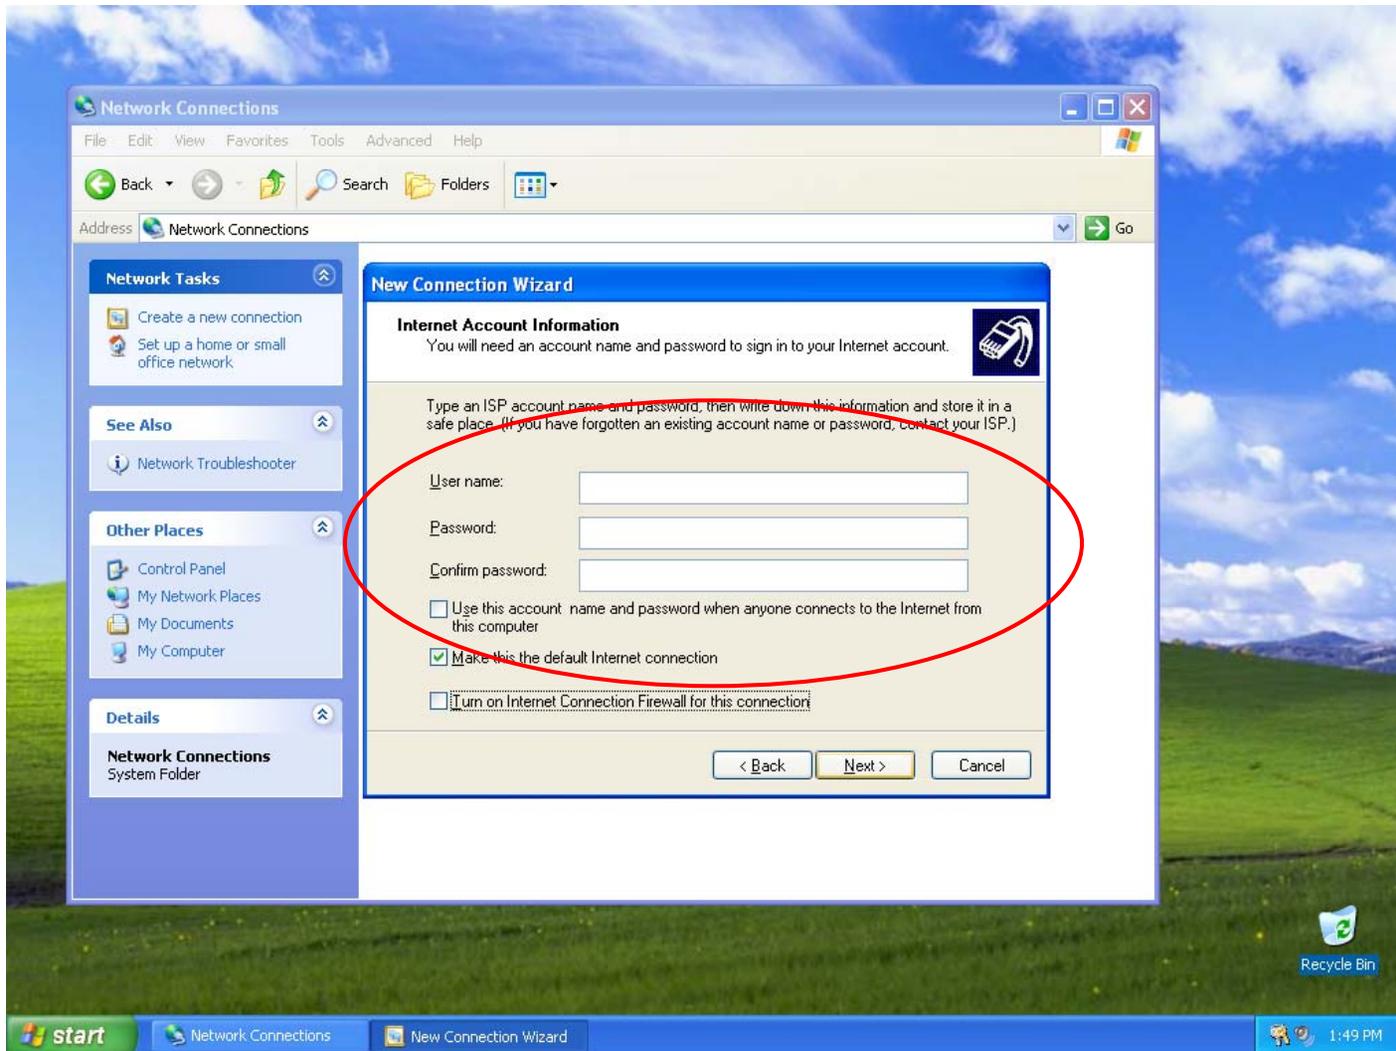

Enter your **Username** and **Password** then click on **Next**

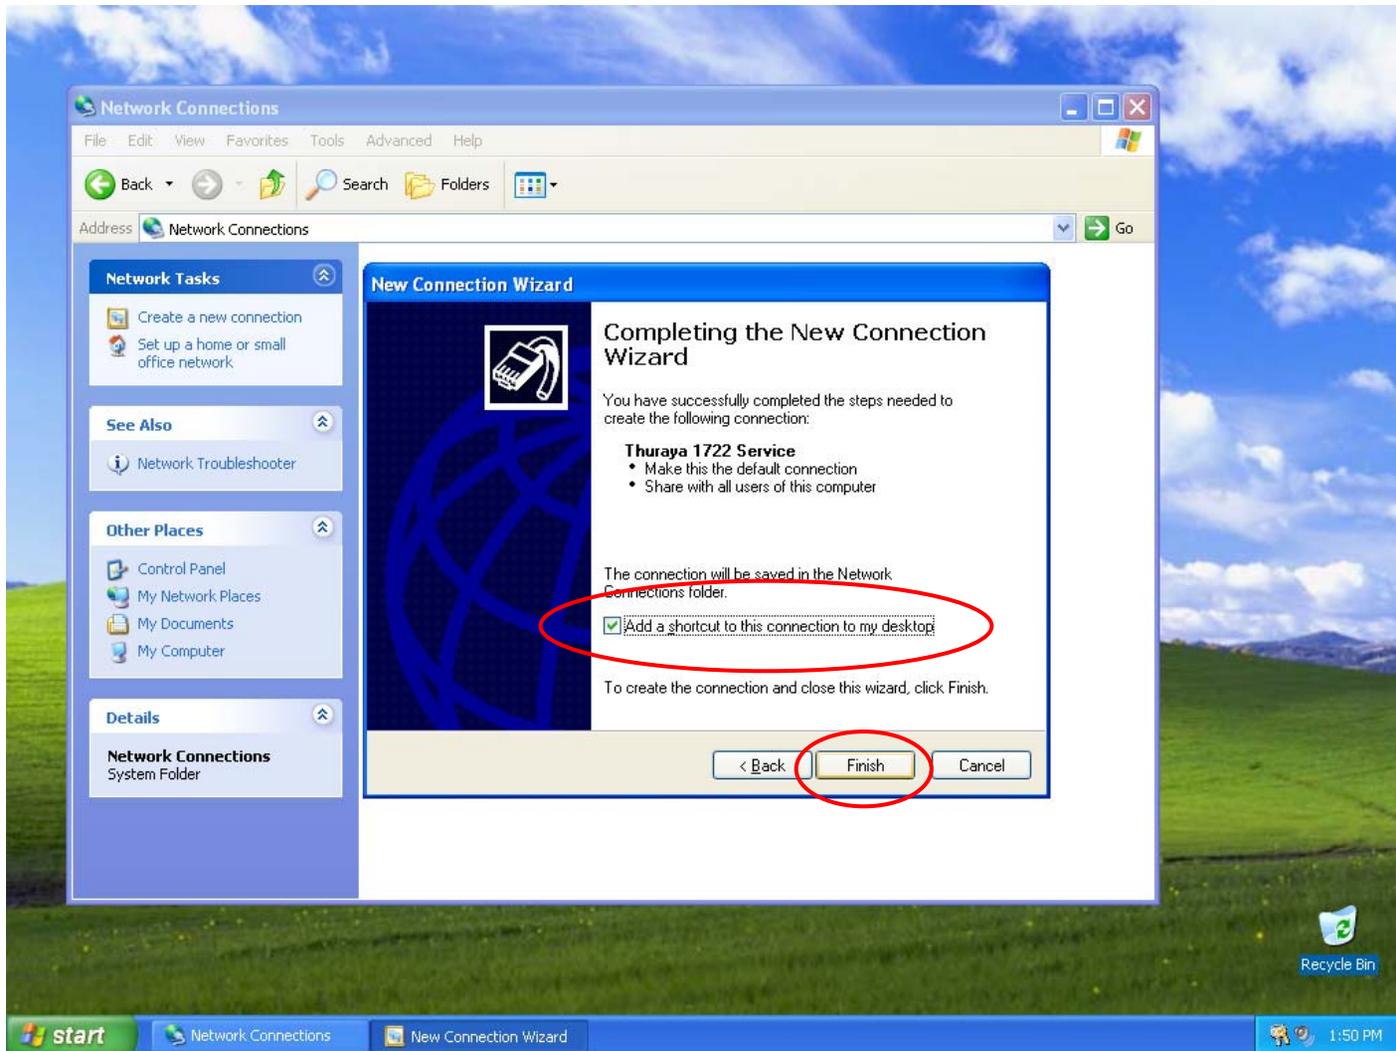

If you would like a **Desktop Shortcut** tick this option and click on **Finish**

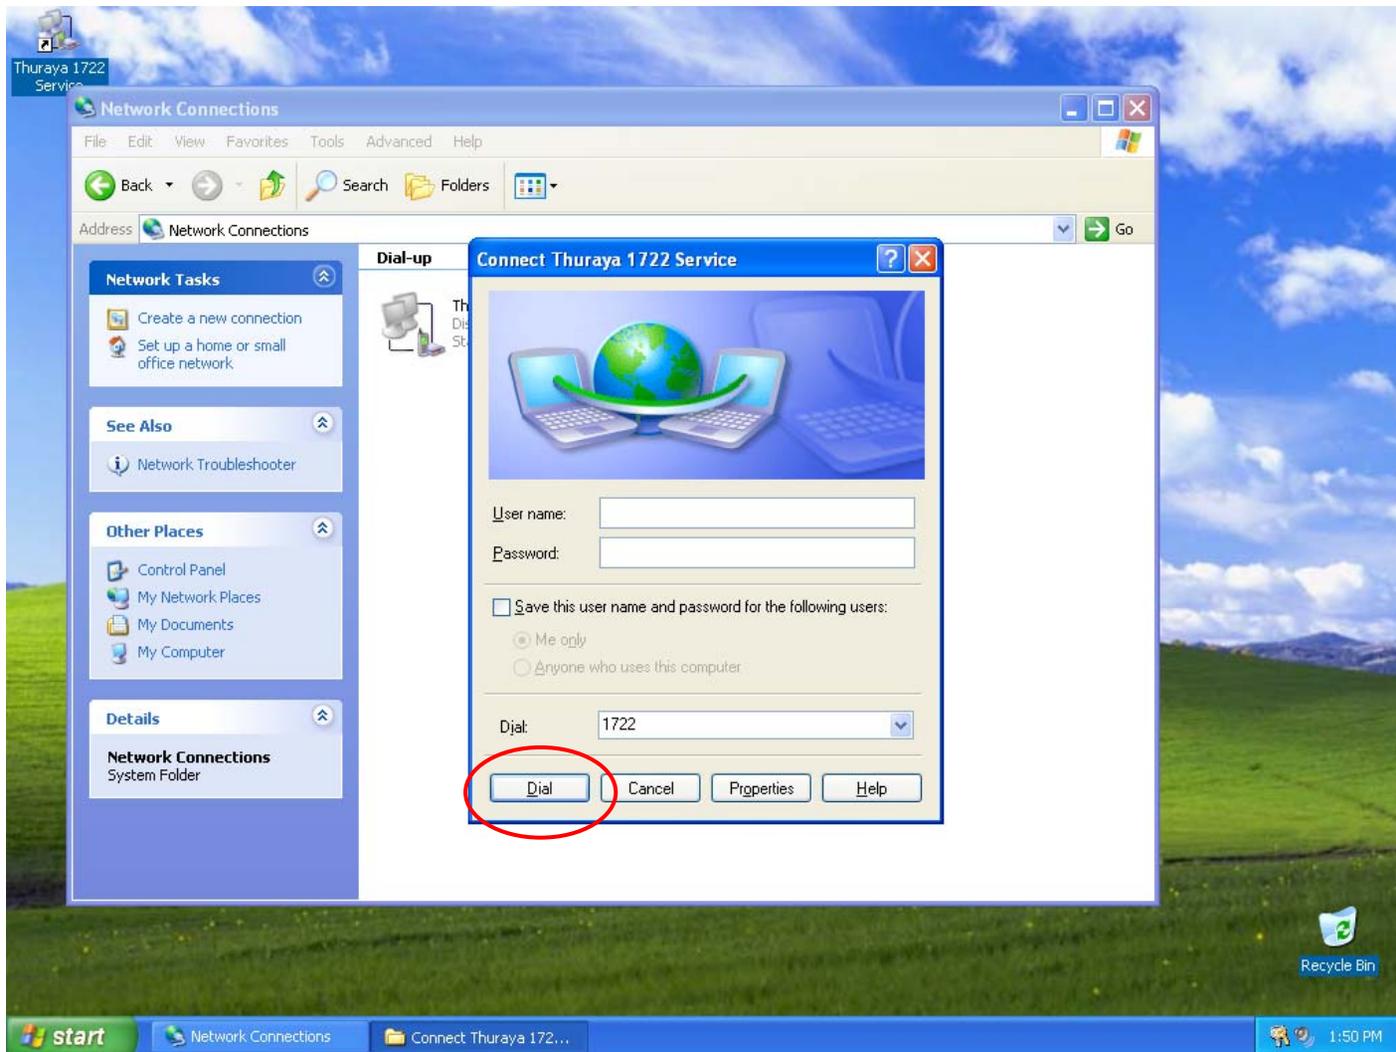


The Connection Dialogue will automatically launch. If you have a Thuraya phone connected click on **Dial** to test the connection

USB > Serial Converter Installation



Plug in the USB > Serial convertor.

The Found New Hardware Wizard will appear, select **No, not this time** and click on **Next**

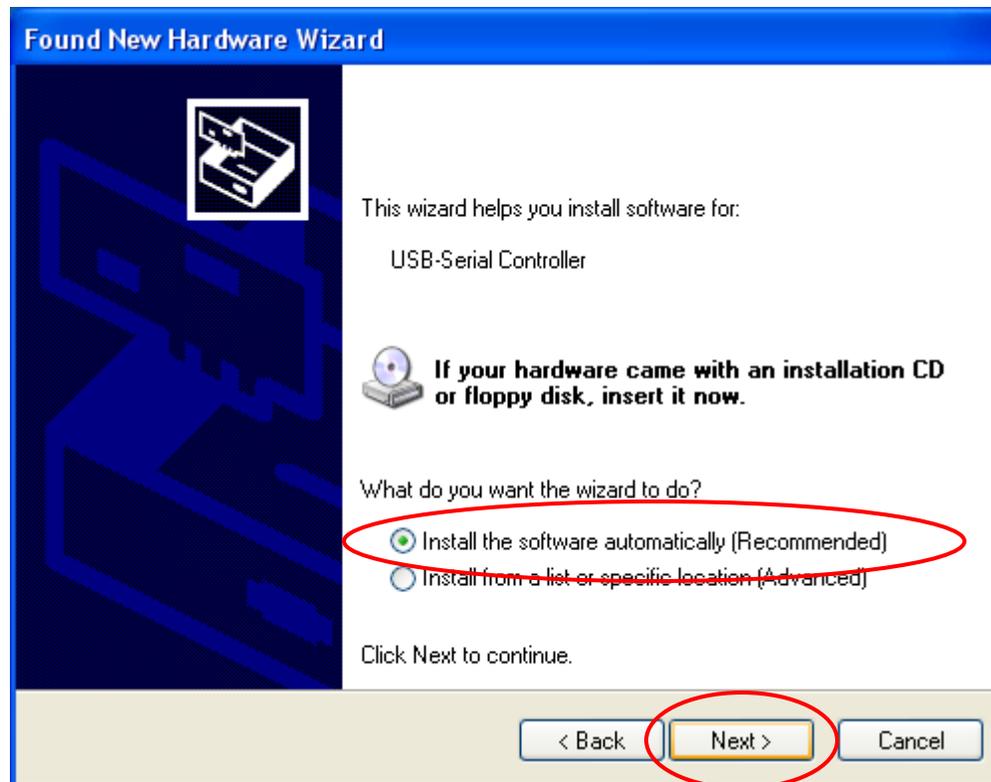


Insert the CD supplied with the convertor.


Select **Install the software automatically** and click on **Next**



The Found New Hardware Wizard will run automatically

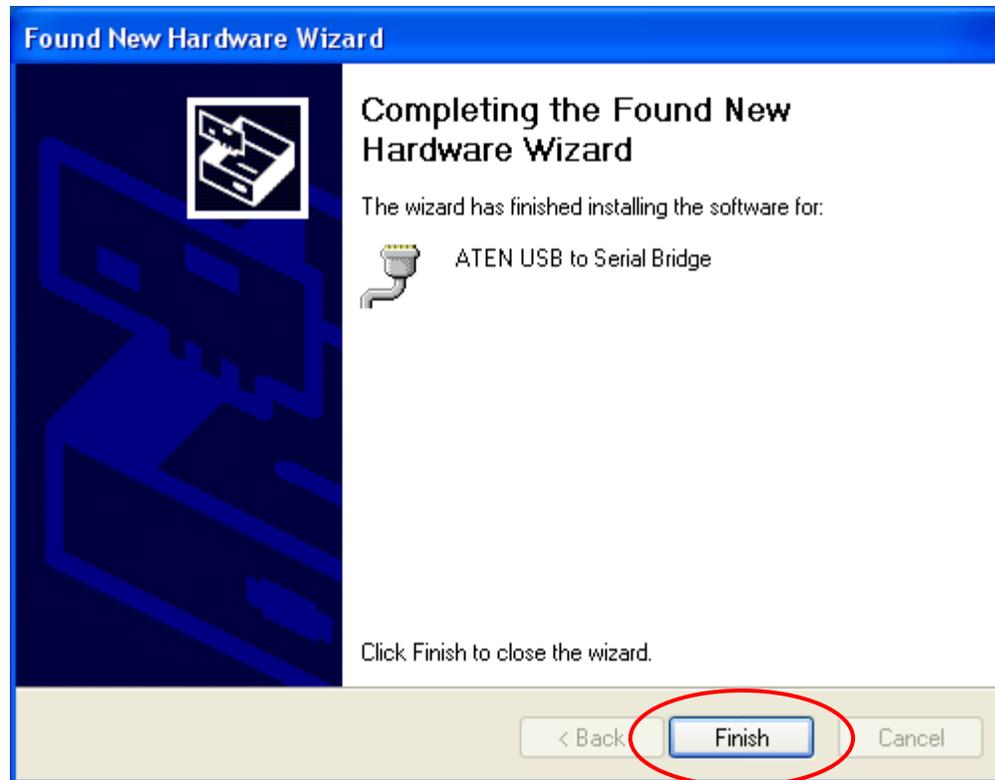

The Found New Hardware Wizard will show that it has finished installing the software, click on **Finish**

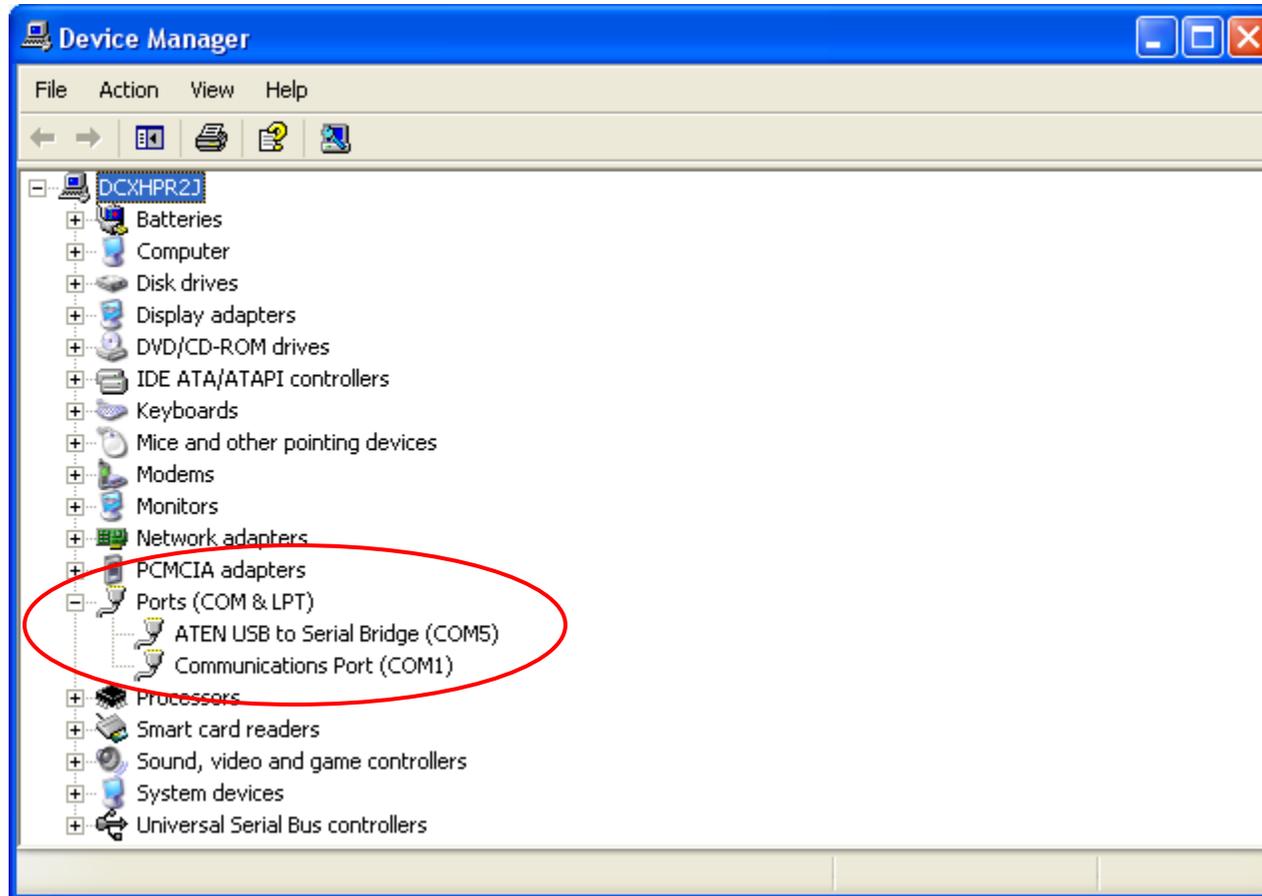

Go to Control Panel > Device Manager


Select ports (COM & LPT) and make a note of the port number assigned to the USB > Serial convertor

USB Data Cable Installation



Insert the CD supplied with the cable. The CD will autorun and this screen will appear

Select **INSTALLATION FOR WIN 98 / 2000 / XP**

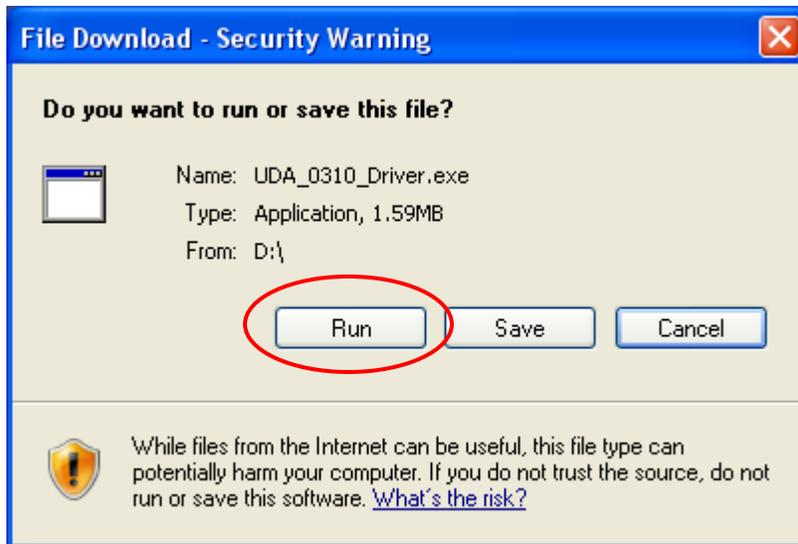


Select **Run**




A Security Warning will appear, stating the publisher could not be verified

Select **Run**

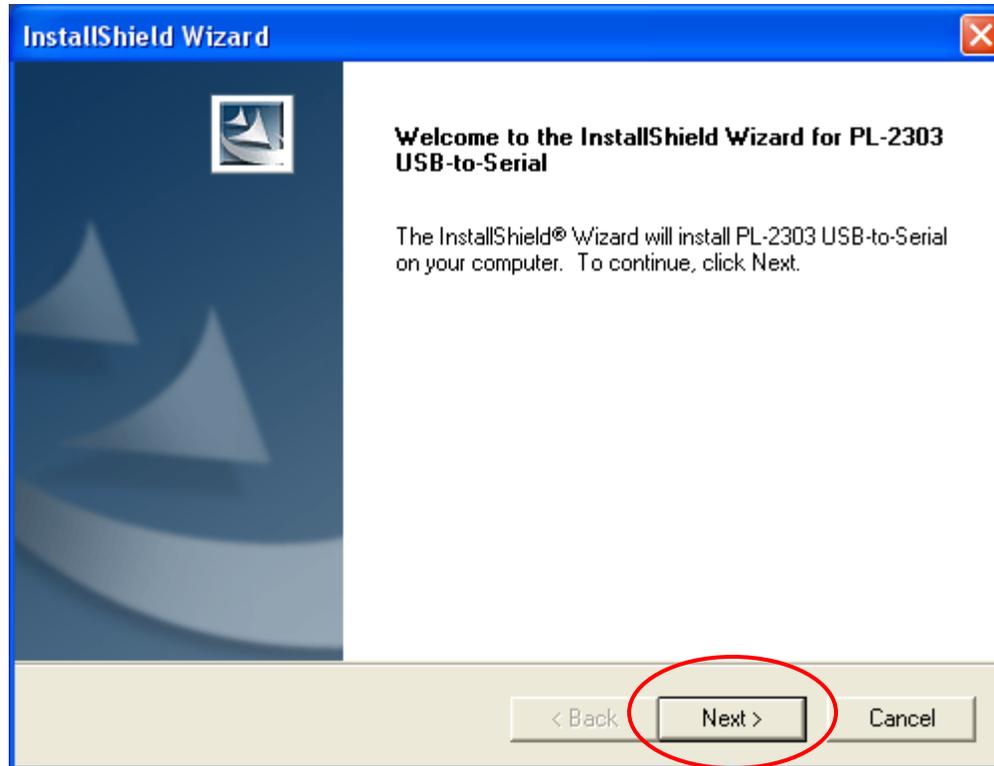


The InstallShield Wizard will appear

Select **Next**

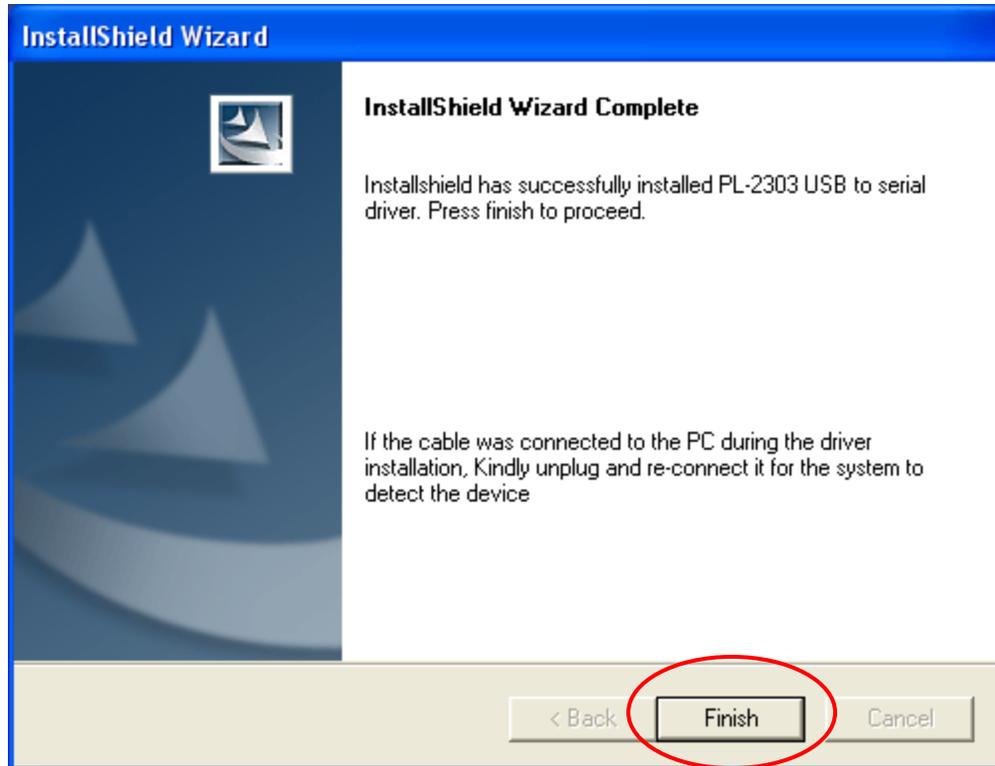

The InstallShield Wizard will show installation complete
Select **Finish**

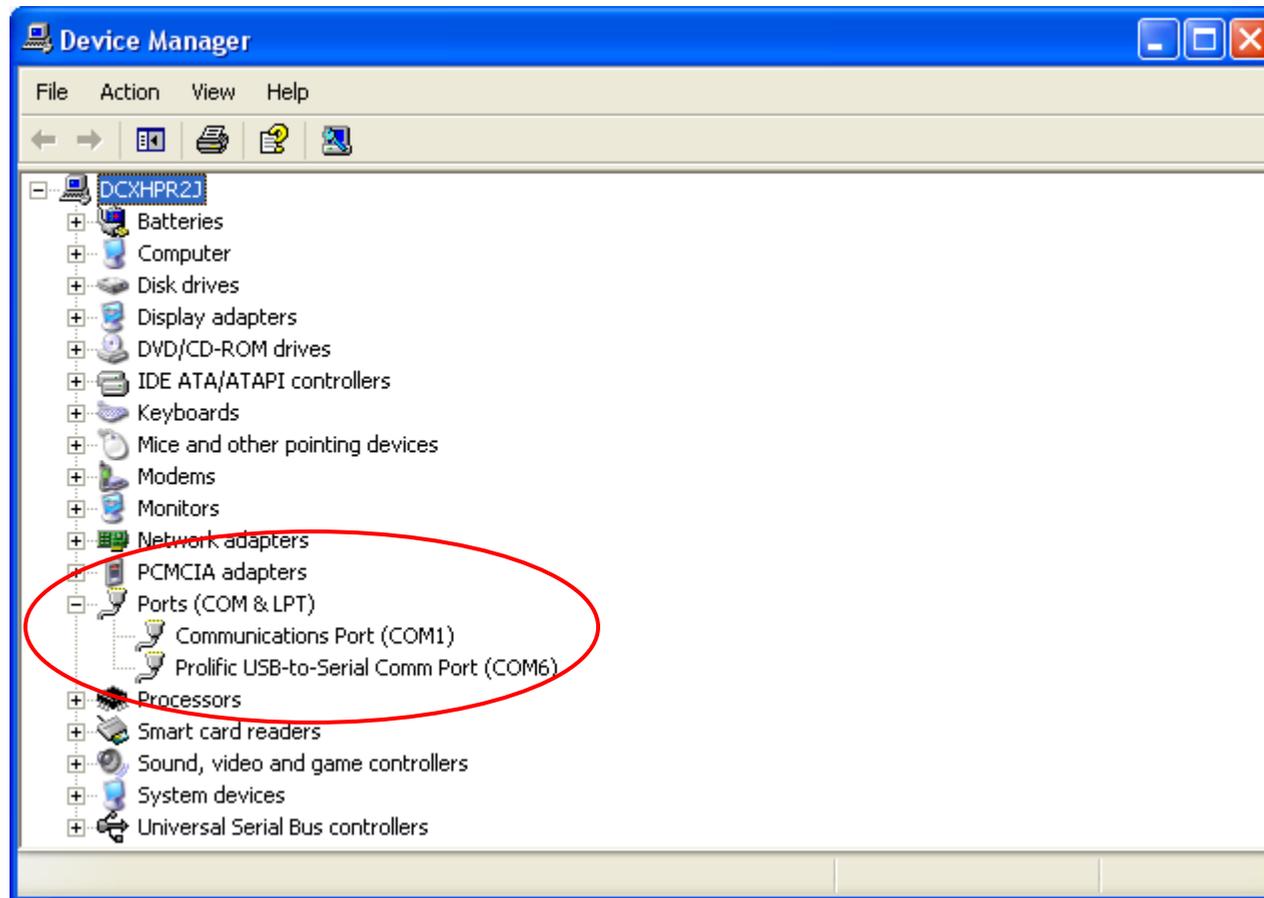

Plug in the USB cable. You will see windows autodetect the cable & confirm new hardware is ready to use.

Go to Control Panel > Device Manager, select Ports (COM & LPT) and make a note of the port number assigned to the **Prolific USB to Serial Comm Port**